



W 700 TECHNICAL CATALOG

GENERAL INFORMATION

TECHNICAL SPECIFICATIONS OF PROFILES

REINFORCEMENT PROFILES

ASSEMBLY OF PROFILES

ACCESSORIES

GENERAL INFORMATION

Exclusive specifications and benefits of UPVC doors and windows:

New UPVC windows with multi-glazed glasses are construction materials that are simply applicable with the common walls and, even, improve their functions.

The UPVC windows are easily usable, nicely depicted and in accordance with the above mentioned information, have a high grade of thermal and low sound conduction insulation.

The technical specifications of the W 700 profile series, submitted the evidence and highly efficient documents of these products to the purchasers.

1. High grade of thermal transfer resistance and low sound-conduction capability of UPVC profile, creates comfort inside. Temperature-exchange resistance for the UPVC frame profile is equal to 0.93m², grade C/W (class1), for the UPVC sash profile is equal to 0.88 m², grade C/W (class1). prevention of the infiltration of the sound of traffic flow is also 35 decibels (in class B).
2. The special specifications of manufacturing UPVC profiles, provide the possibility of numerous manufacturing of different types of windows with multi-mode sliding systems, not only with using the standard essentials but also with anti-theft equipments, these profiles are suitable for the double-glazed glasses up to 32mm in thickness.
3. Galvanized reinforcements profile is contrived in order to increase the static strength inside the frame,sash and mullion profile.
4. The cross-sectional shape of the width of the profiles and the thickness of the UPVC networks guarantee the strength of the welded profiles (weld 90°c or weld in shape of V).
5. Special canal for installing locking mechanism (13 mm) provides the possibility of installation for amplifying equipment, therefore, the security and anti-theft characteristics increases in these products
6. Complete removal of undesirable moisture for use in seals and rubber gasket.
7. Height of the part that glass is contrived to protect the edges of the object from the Ultraviolet-Ray and UVB-Ray. Moreover, it makes the possibility of darkening and cooling of the indoor space minimum.
8. Double seal (outdoor and indoor), prevents excessive dryness and provides maximum protection against the wind and rain and prevents freezing of the pipes in below zero temperatures, therefore, it guarantees the resistance of temperature exchange and sound protection to be extremely high.

9. Applying high-standard UPVC raw-materials, guarantees the physical and chemical characteristics of the products produced from these raw productions. Durability in below zero temperatures, tensional strength, considerable toughness, thermal resistance, satisfaction level of quality and long life cycle are some of these characteristics.

10. UPVC profiles have health certificate for a wide range of users and are completely safe for the human health.

11. Because of the fireproof nature of the UPVC materials, UPVC profiles are incombustible. According to the fire-fighting certificate, UPVC profiles are in accordance with the fire-fighting rules and conforms to the combustibility rate G2 (limited ignition) and burning-rate B2 (medium-ignition).

12. It is possible to produce profile with any color spectrum and laminate coating.

13. The multi-glazed glass is the main part of the raw materials of UPVC windows. Based on the technical test of life cycle of the multi-glazed glasses, the longevity of these glasses could be guaranteed upto 20 years. Application of multi-glazed glasses has many advantages, for instance: increasing the temperature-protection (B2), decreasing noisiness (reduction of audio-disturbance about 30-50 decibel), moreover, these glasses are anti-freeze and anti-steam (upto temperature 40°c).

New technology provides the possibility of manufacturing two-phase pressure insulated glasses and thereupon promotion of the quality and reliability. Suitable function of UPVC door or window is not only limited to the technical features or the quality of applied necessities but also is dependent on the montage accuracy. The Experienced and Skillful manufacturers use new connections in manufacturing the products. The relation between windows and various opening systems has its own specifications and special connections. Based on the purchaser's request, creating exclusive user connections is possible (Reinforcement of heat and thermal insulation or water-proofing). UPVC profiles surfaces don't require being covered with color-layer and they are easy to protect. Because of being smooth and having polished surface, dust does not accumulate on the profiles. The UPVC windows that successfully have been installed and operated are very suitable insulators against the environmental conditions for the residential and administrative complexes. However, this insulation leads to excessive moisture. Sometimes, this results in wet windows and the walls, especially in the cases of lack of a good ventilation inside the house. One of the actions that are applicable to prevention in this cases, is repairing the ventilation with using the tools that make the air-stream limited. The UPVC windows with the mentioned tools could create a passing air-stream with the size of 1.2 mm., and, meanwhile, preventing air-dryness and condensation in the inside space.

For increasing the longevity of UPVC windows, it's necessary to take the following preventive measures once in a year:

1. All the moving components should be lubricated by appropriate lubricants.
2. Seals must be checked to make sure that they are in an ideal mood, it shall be more attention to the tires of the glass part (all the damaged tires should be replaced).
3. Water evacuation grooves (grooves of rain water), must be checked, and if it is necessary, they should be cleaned.
4. Outer surface of the UPVC profiles should be cleaned with water, and if it is needed, with detergent. Avoid using oil, petrol and other similar materials which are oil-based.

Heat Protection:

The UPVC windows guarantee a high level of thermal protection in order to ensure inside comfort. W 700 Multi-hole profiles, they provide excellent heat insulation. The rate of these profiles is 1.3 Wt. /m².

Sound Protection:

Audio-insulation depends on the manufacturing factors of UPVC windows to a large extent, nevertheless, not only the frame, sash and mullion profile, but also the type of glass and execution of its function has a high importance.

Humidity and Ventilation:

The UPVC windows also provide air-circulation in the buildings. Room ventilation is necessary in order to ensure keeping fresh air inside (in order to eliminating the causes of pollution like CO₂) and to create natural heat ventilation (stream outlet). The human beings are one of the main sources of moisture in the building. The moisture increases with their breathing. It is completely obvious that, breathing of this air once happened and then the moisture should get out of the room, otherwise, could lead to density of humidity in the internal surface of the windows and the edge of the walls.

Constant humidity concentration in the air could lead to growth of fungus on the furniture, walls and ceiling. UPVC profiles are suitable heat protectors and usually don't sweat or freeze.

The specifications of the UPVC Profiles provide using the standard and anti-theft equipments and essentials. Moreover, filling the holes and grooves doesn't need any special equipment.

Maintenance of the UPVC Profile:

Maintaining the UPVC profiles is very easy. They don't need any special repair or care but several simple rules should be considered in order to save the life cycle of these windows.

Annual care of the UPVC windows:

Periodically, check the outer side of the windows and if necessary, clean the outer sides. Water drain slots must be checked and if necessary, they must be patched. The caulk rubbers should be checked. Pay attention to the rubbers which are associated with glass and ,in case of damage, they must be changed. All the mobile components must be lubricated using suitable lubrication.

Cleaning of UPVC Profiles:

The UPVC profiles can be cleaned with regular water and detergent. Do not use any detergent that can cause wear, including powerful organic compounds.

The dust from the production process as well as the installation of the window on which it is accumulated can easily be eliminated by ordinary water and warm water. The use of oil, petrol and other substances should be strictly avoided.

Damages caused by machining and unwanted holes can be repaired with special adhesives and then filled. Different filling tools can be used for this purpose, but the filled space should be as small as possible. The filled surface should then be polished using a roller. Surface roughness and small scratches can be eliminated by finishing the surface.

Damaged UPVC profiles caused by machining can be repaired with parts of the same damaged profile. A small piece of the same profile should be turned into dough in the boiling process with hot air and to be used to cover the damaged part. This operation must be performed after all the steps mentioned above have been applied.
























Well-installed UPVC windows provide a high degree of insulation against environmental factors. However, this insulation leads to excessive moisture. Occasionally, the lack of proper ventilation leads to wet walls and windows.

The only way to prevent this condensation is to improve ventilation conditions. Improvement of ventilation by means of fittings that limit the air flow to a limited extent. The UPVC windows with the mentioned specifications can create as much as 1-2 mm airflow space and prevent indoor air from condensation.



Specification of Wintech UPVC Profiles:

Wintech UPVC Windows are produced using high-quality PVC compound in the best structural condition. In the production of Wintech profiles, the production method is used in extrusion mode. Continuous monitoring of production not only ensures the dimensional quality but also the quality of the produced profiles. Production profiles are in accordance with the RAL RG 716/1 requirements.

UPVC compound used in production:	Wintech UPVC compound in compliance with EN 7748
Density:	1.46 g/cm ³
Impact Strength (up to -40 °C):	no crack or rupture
Resistance to windloads:	Class C4/B4 according to EN 12210
Resistance to driving rain:	Class 9A according to EN 12208
Permeability of air:	Class 4 according to EN 12207
Tensile strength:	≥ 40 N/mm ²
Elasticity of Modulus:	≥ 2500 N/mm ²
Coefficient of linear thermal expansion:	$0.8 \cdot 10^{-4}$ K ⁻¹
Thermal conductivity:	0.16 W/mK
Specific resistance:	1016 Ω cm
Fire behaviour:	self extinguishing, flame retardant
Resistant to:	acids, salts, salt solutions, bases, sea water, benzene, oil, lime, cement, fumes of all sorts
Wall thickness:	2.8 - 3 mm
Possible processing techniques:	boring, milling, sawing, filing, welding, grinding
Corner joints:	welded
Types of openings:	turn, turn and tilt, tilt, sliding, folding
Possible glass types:	insulating or non-insulating glass types with all common glass thicknesses between 4 and 32 mm.
Seals:	EPDM-TPV and TPE
Seal Color:	BLACK
Main application areas:	residential houses, high-rise buildings, schools, administrative buildings, industrial buildings
Coefficient of heat transfer:	$k =$ between 2.6 - 1.4 W/m ² K depending on the insulating glass used.




Frame profile

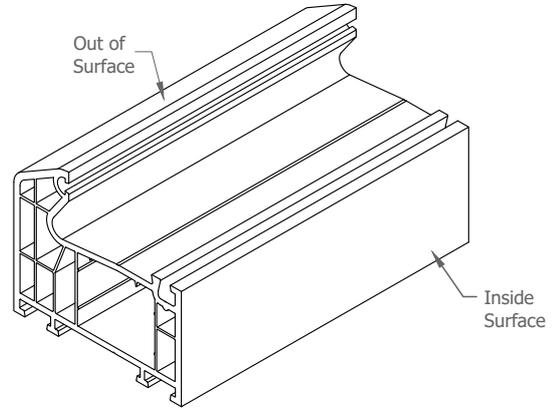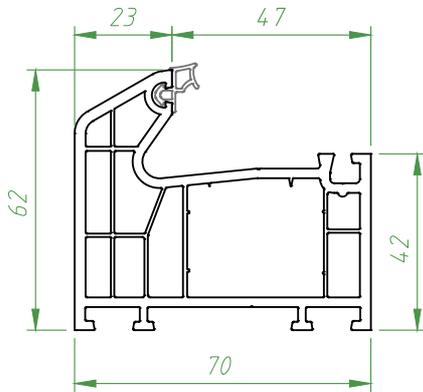



Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	○	41200- 01000	Inside Lmainate	Outside Lmainate
	White / With Rubber	●	41200- 91000		
Brown Laminate / Golden Oak	○	41200- 31003	41200- 01001	41200- 01002	
Brown Laminate / Dark Oak	○	41200- 31033	41200- 01031	41200- 01032	
Brown Laminate / Charcoal Brown	○	41200- 31053	41200- 01051	41200- 01052	
Gray Laminate / Wintech Gray	○	41200- 31063	41200- 01061	41200- 01062	

○ Without Rubber ● With Rubber




Frame Profile With Sill

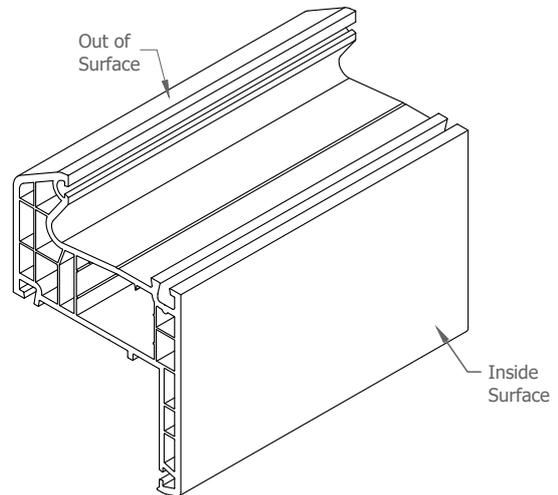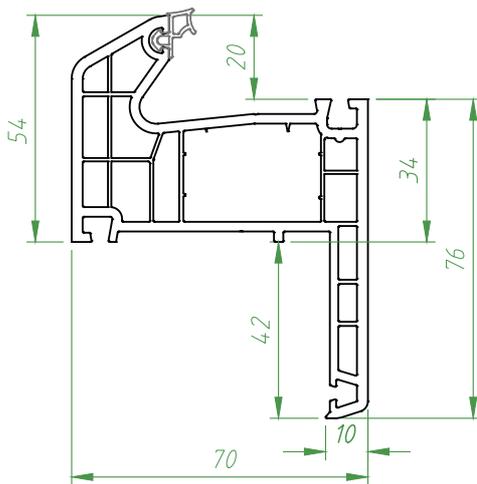




Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	○	41200- 01300	Inside Lmainate	Outside Lmainate
	White / With Rubber	●	41200- 91300		
Brown Laminate / Golden Oak	○	41200- 31303	41200- 01301	41200- 01302	
Brown Laminate / Dark Oak	○	41200- 31333	41200- 01331	41200- 01332	
Brown Laminate / Charcoal Brown	○	41200- 31353	41200- 01351	41200- 01352	
Gray Laminate / Wintech Gray	○	41200- 31363	41200- 01361	41200- 01362	

○ Without Rubber ● With Rubber



Offset Type Sash Profile

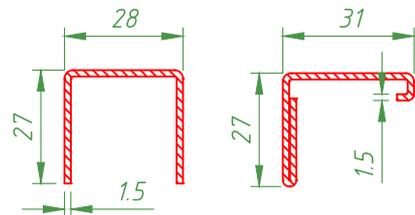
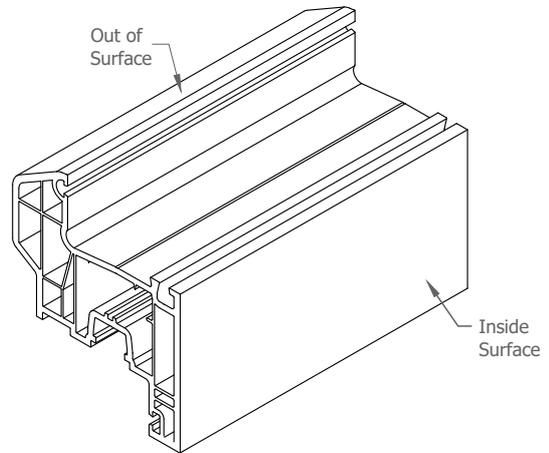
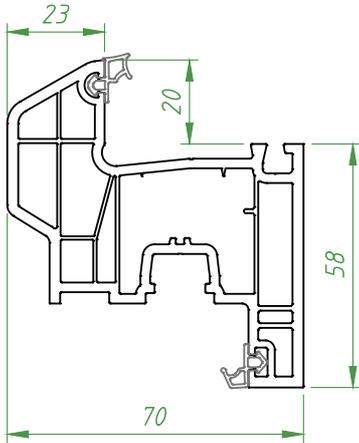


Quantity in the package: 6 x 6mt = 36 meters

Profile Code			Inside Lmainate	Outside Lmainate
	White / Without Rubber	White / With Rubber		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input checked="" type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		

Without Rubber With Rubber

Sash Profile

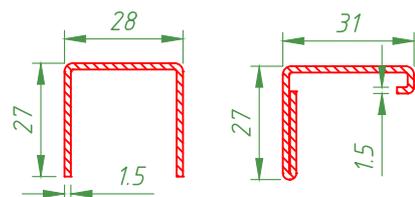
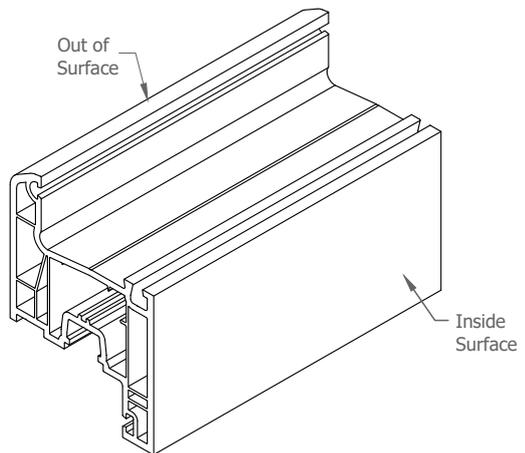
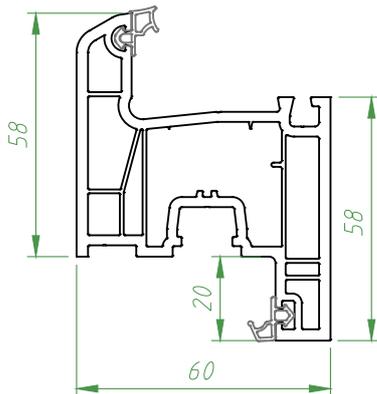


Quantity in the package: 6 x 6mt = 36 meters

Profile Code			Inside Lmainate	Outside Lmainate
	White / Without Rubber	White / With Rubber		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input checked="" type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		
	<input type="radio"/>	<input type="radio"/>		

Without Rubber With Rubber

Mullion profile


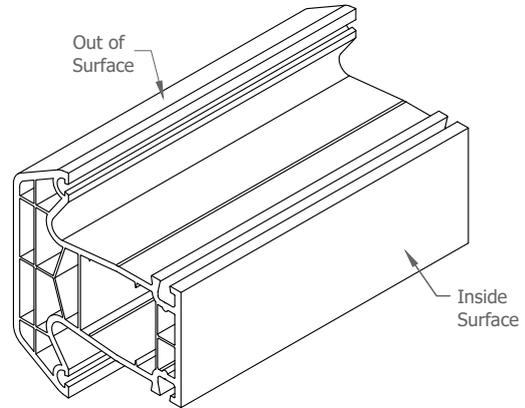
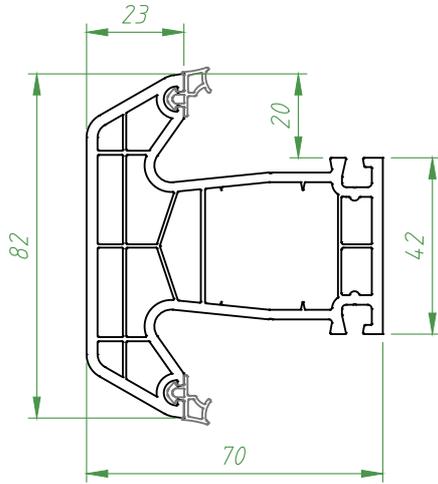


Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	White / With Rubber	Brown Laminate / Golden Oak	Brown Laminate / Dark Oak	Brown Laminate / Charcoal Brown	Gray Laminate / Wintech Gray	Inside Lmainate	Outside Lmainate
	<input type="radio"/> 41200- 03000	<input checked="" type="radio"/> 41200- 93000	<input type="radio"/> 41200- 33003	<input type="radio"/> 41200- 33033	<input type="radio"/> 41200- 33053	<input type="radio"/> 41200- 33063	41200- 03001	41200- 03002
							41200- 03031	41200- 03032
							41200- 03051	41200- 03052
							41200- 03061	41200- 03062

Without Rubber With Rubber

Mullion profile

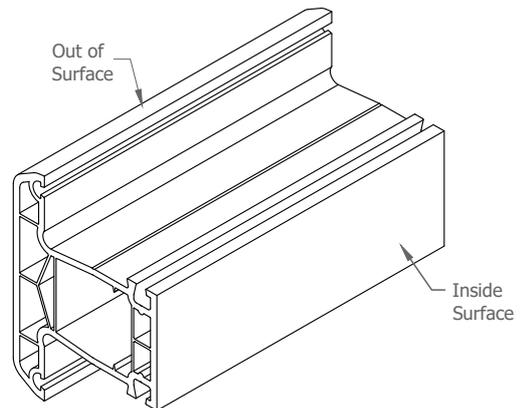
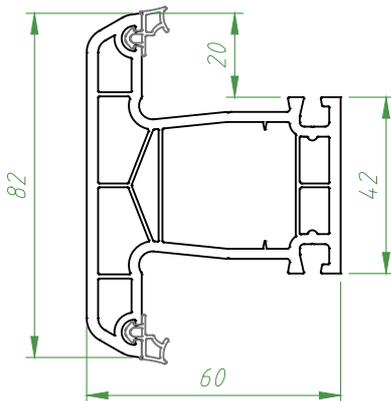


Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	White / With Rubber	Brown Laminate / Golden Oak	Brown Laminate / Dark Oak	Brown Laminate / Charcoal Brown	Gray Laminate / Wintech Gray	Inside Lmainate	Outside Lmainate
	<input type="radio"/> 41100- 03000	<input checked="" type="radio"/> 41100- 93000	<input type="radio"/> 41100- 33003	<input type="radio"/> 41100- 33033	<input type="radio"/> 41100- 33053	<input type="radio"/> 41100- 33063	41100- 03001	41100- 03002
							41100- 03031	41100- 03032
							41100- 03051	41100- 03052
							41100- 03061	41100- 03062

Without Rubber With Rubber

Door Sash profile

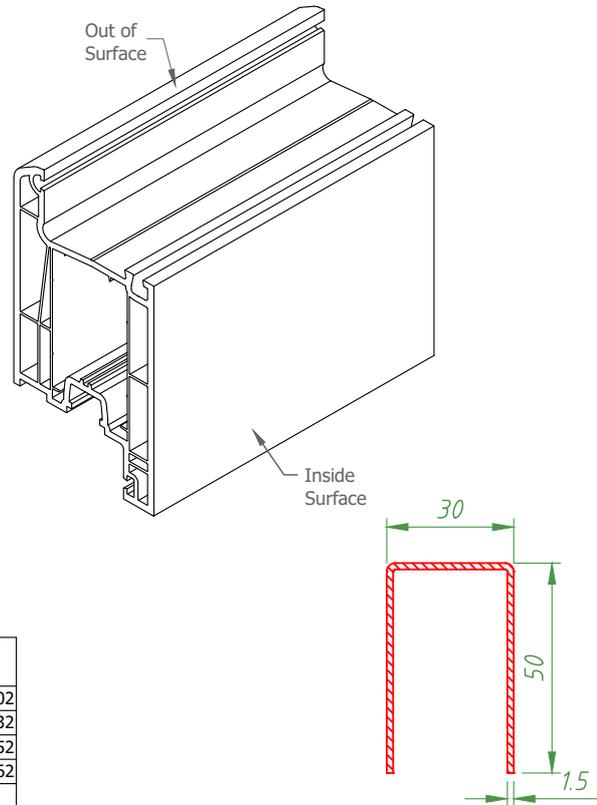
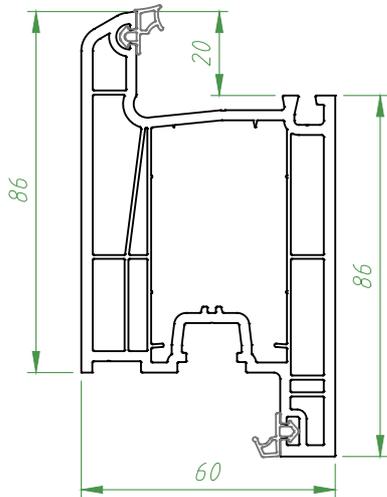


Quantity in the package: 4 x 6mt =24 meters

Profile Code			Inside Lmainate	Outside Lmainate
	White / Without Rubber	White / With Rubber		
White / Without Rubber	<input type="radio"/>	41100- 07000		
White / With Rubber	<input checked="" type="radio"/>	41100- 97000		
Brown Laminate / Golden Oak	<input type="radio"/>	41100- 37003	41100- 07001	41100- 07002
Brown Laminate / Dark Oak	<input type="radio"/>	41100- 37033	41100- 07031	41100- 07032
Brown Laminate / Charcoal Brown	<input type="radio"/>	41100- 37053	41100- 07051	41100- 07052
Gray Laminate / Wintech Gray	<input type="radio"/>	41100- 37063	41100- 07061	41100- 07062

Without Rubber With Rubber

Out Opening Door Sash Profile

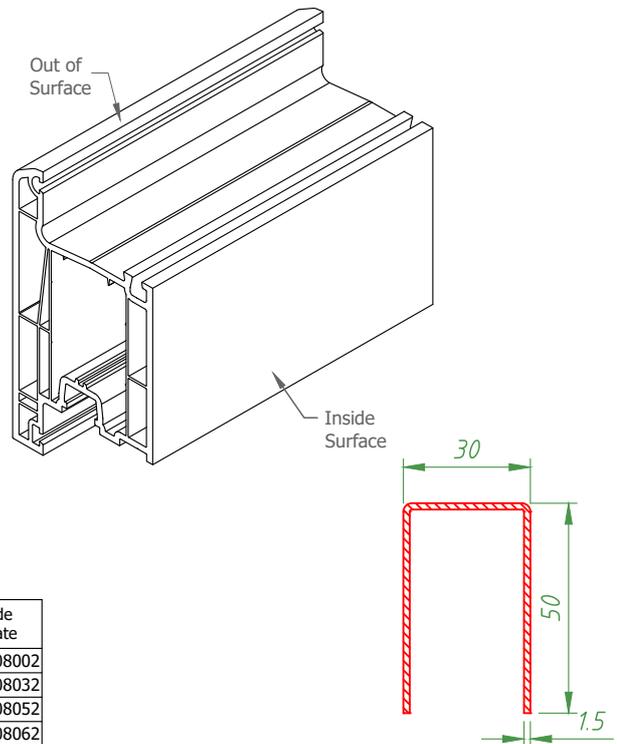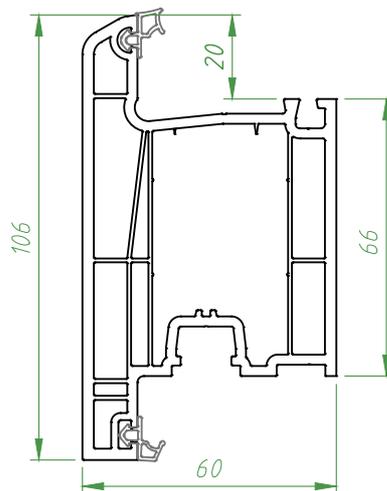


Quantity in the package: 4 x 6mt =24 meters

Profile Code			Inside Lmainate	Outside Lmainate
	White / Without Rubber	White / With Rubber		
White / Without Rubber	<input type="radio"/>	41100- 08000		
White / With Rubber	<input checked="" type="radio"/>	41100- 98000		
Brown Laminate / Golden Oak	<input type="radio"/>	41100- 38003	41100- 08001	41100- 08002
Brown Laminate / Dark Oak	<input type="radio"/>	41100- 38033	41100- 08031	41100- 08032
Brown Laminate / Charcoal Brown	<input type="radio"/>	41100- 38053	41100- 08051	41100- 08052
Gray Laminate / Wintech Gray	<input type="radio"/>	41100- 38063	41100- 08061	41100- 08062

Without Rubber With Rubber

Single Glazing Bead Profile (4 - 6 mm)

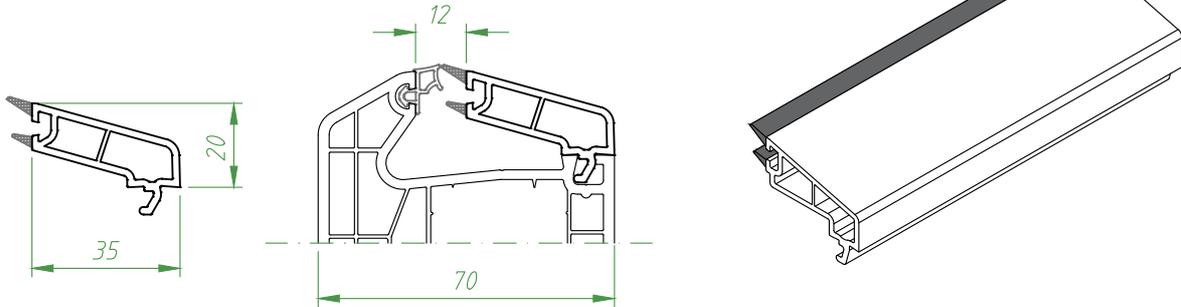


Quantity in the package: 20 x 6mt =120 meters

Profile Code	White / Without Rubber	White / With Rubber	*****	Inside Lmainate	Outside Lmainate
	<input type="radio"/>	<input checked="" type="radio"/>	40101- 96400	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26402	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26432	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26452	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26462	*****	*****

Without Rubber With Rubber

Double Glazing Bead Profile (20 mm)

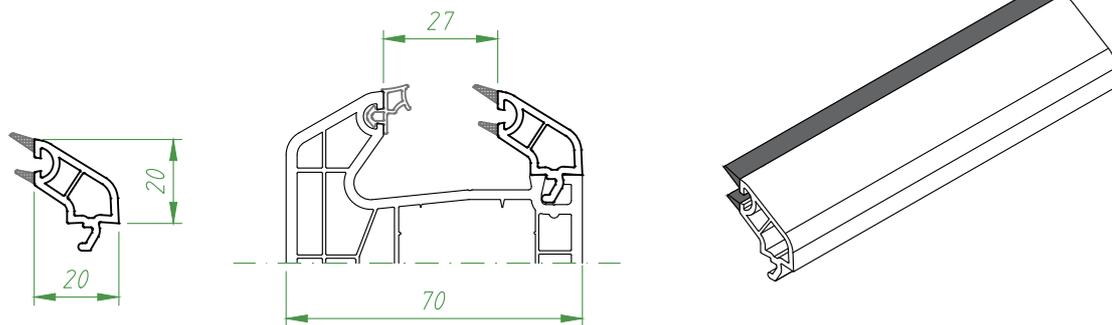


Quantity in the package: 30 x 6mt =180 meters

Profile Code	White / Without Rubber	White / With Rubber	*****	Inside Lmainate	Outside Lmainate
	<input type="radio"/>	<input checked="" type="radio"/>	40101- 96200	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26202	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26232	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26252	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26262	*****	*****

Without Rubber With Rubber

Double Glazing Bead Profile (20 mm)

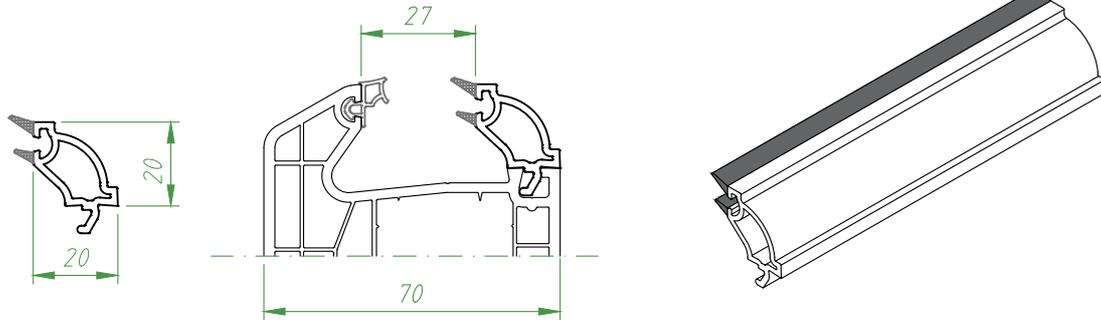


Quantity in the package: 30 x 6mt =120 meters

Profile Code	White / Without Rubber	White / With Rubber	*****	Inside Lmainate	Outside Lmainate
	<input type="radio"/>	<input checked="" type="radio"/>	40101- 96100	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26102	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26132	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26152	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26162	*****	*****

Without Rubber With Rubber

Double Glazing Bead Profile (24 mm)

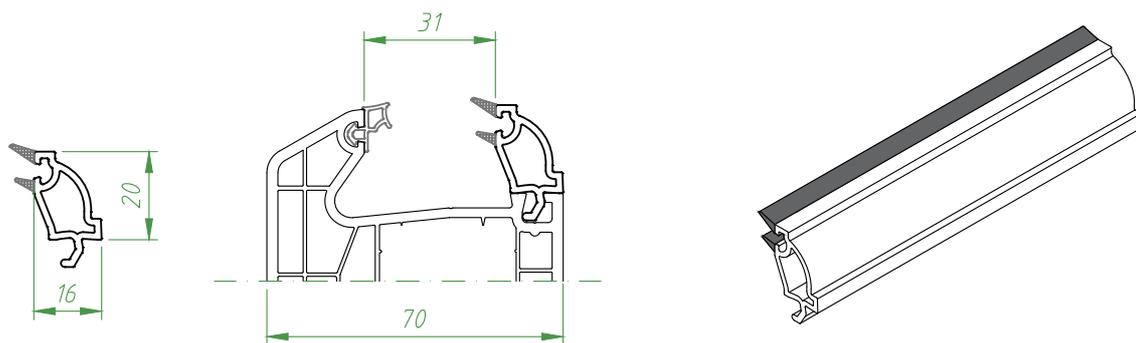


Quantity in the package: 30 x 6mt =180 meters

Profile Code	White / Without Rubber	White / With Rubber	*****	Inside Lmainate	Outside Lmainate
	<input type="radio"/>	<input checked="" type="radio"/>	40101- 96500	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26502	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26532	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26552	*****	*****
	<input checked="" type="radio"/>	<input type="radio"/>	40101- 26562	*****	*****

Without Rubber With Rubber

Triple Glazing Bead Profile (32 mm)



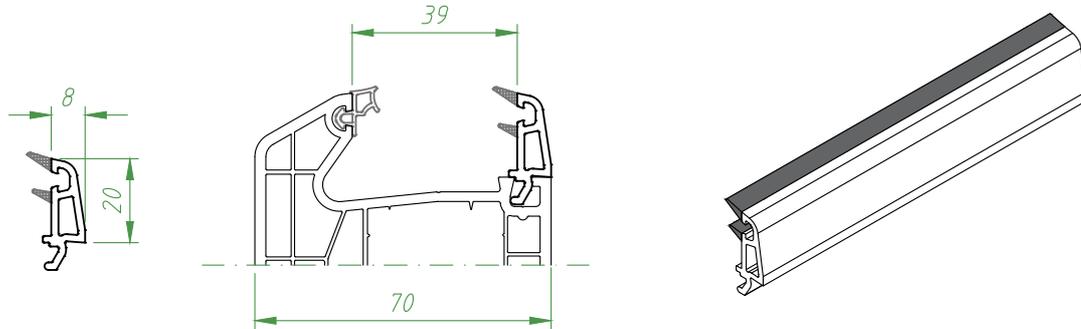


Quantity in the package: 30 x 6mt =180 meters

Profile Code	White / Without Rubber	○	*****	Inside Lmainate	Outside Lmainate
	White / With Rubber	●	40101- 96300		
	Brown Laminate / Golden Oak	●	40101- 26302	*****	*****
	Brown Laminate / Dark Oak	●	40101- 26332	*****	*****
	Brown Laminate / Charcoal Brown	●	40101- 26352	*****	*****
	Gray Laminate / Wintech Gray	●	40101- 26362	*****	*****

○ Without Rubber ● With Rubber

Lap Joint profile


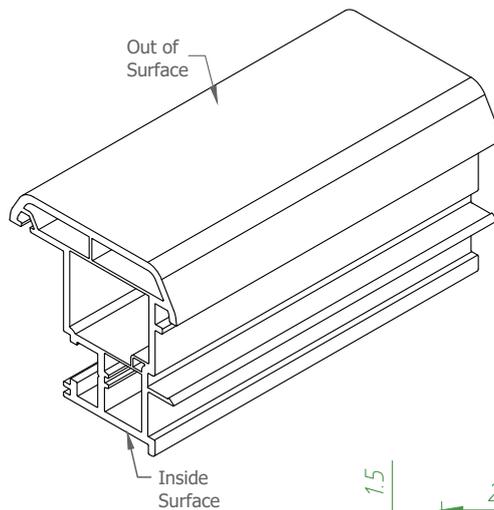
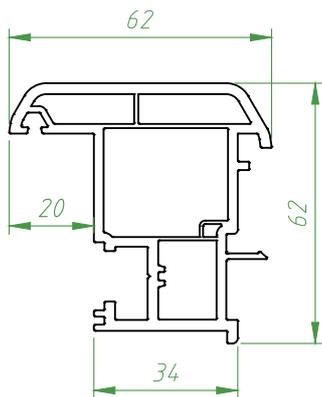


Quantity in the package: 6 x 6mt =36 meters

Profile Code	White / Without Rubber	○	41100- 09000	Inside Lmainate	Outside Lmainate
	White / With Rubber	●	*****		
	Brown Laminate / Golden Oak	○	41100- 39003	41100- 09001	41100- 09002
	Brown Laminate / Dark Oak	○	41100- 39033	41100- 09031	41100- 09032
	Brown Laminate / Charcoal Brown	○	41100- 39053	41100- 09051	41100- 09052
	Gray Laminate / Wintech Gray	○	41100- 39063	41100- 09061	41100- 09062

○ Without Rubber ○ With Rubber

Pipe Angular Profile

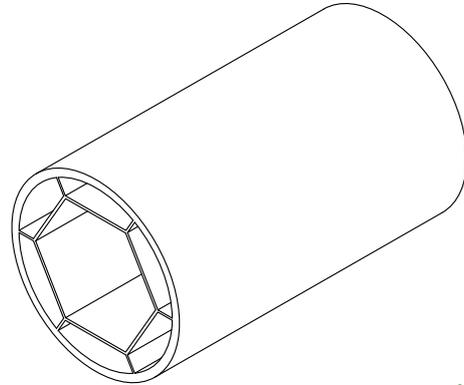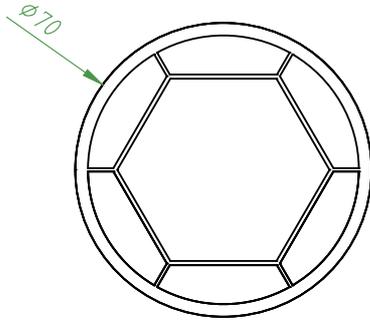



Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	20112- 07000	One side
	White / With Rubber	*****	Lmainate *
	Brown Laminate / Golden Oak	20112- 37001	20112- 07003
	Brown Laminate / Dark Oak	20112- 37031	20112- 07033
	Brown Laminate / Charcoal Brown	20112- 37051	20112- 07053
	Gray Laminate / Wintech Gray	20112- 37061	20112- 07063

○ Without Rubber ● With Rubber

* One side of the laminate includes 50% of the profile

Angled Pipe Adaptor Profile


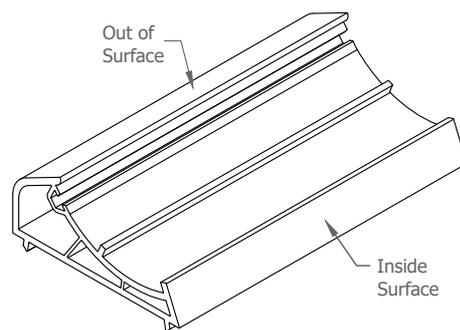
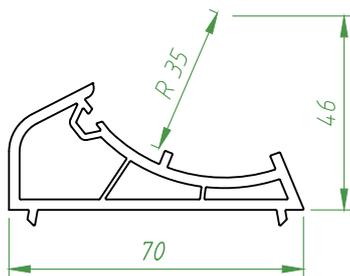


Quantity in the package: 12 x 6mt = 72 meters

Profile Code	White / Without Rubber	20111- 04000	Inside Lmainate	Outside Lmainate
	White / With Rubber	*****		
	Brown Laminate / Golden Oak	20111- 34003	20111- 04002	20111- 04003
	Brown Laminate / Dark Oak	20111- 34033	20111- 04032	20111- 04033
	Brown Laminate / Charcoal Brown	20111- 34053	20111- 04052	20111- 04053
	Gray Laminate / Wintech Gray	20111- 34063	20111- 04062	20111- 04063

○ Without Rubber ● With Rubber

Corner Profile

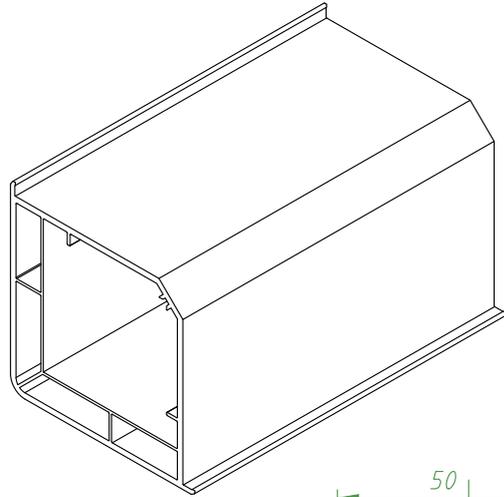
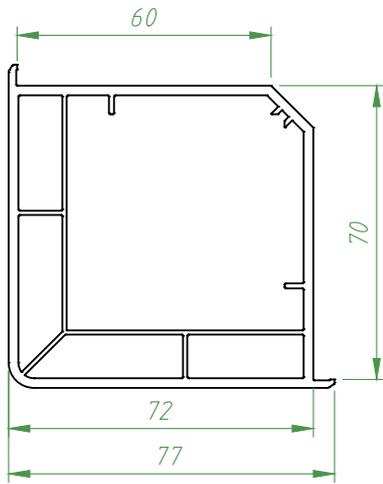


Quantity in the package: 4 x 6mt =24 meters

Profile Code	White /	○	40106- 02000	Inside Lmainate	Outside Lmainate
	White / With Rubber	●	*****		
	Brown Laminate / Golden Oak	○	40106- 22003	*****	*****
	Brown Laminate / Dark Oak	○	40106- 22033	*****	*****
	Brown Laminate / Charcoal Brown	○	40106- 22053	*****	*****
	Gray Laminate / Wintech Gray	○	40106- 22063	*****	*****

○ Without Rubber ● With Rubber

Coupling Profile

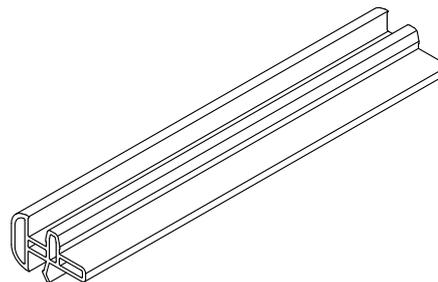



Quantity in the package: 30 x 6mt =180 meters

Profile Code	White / Without Rubber	○	40106- 01000
	White / With Rubber	●	*****
	Brown / Without Laminate	○	40106- 21000
	Gray / Without Laminate	○	40106- 61000
	*****	○	*****
	*****	○	*****

○ Without Rubber ● With Rubber

Holder Profile

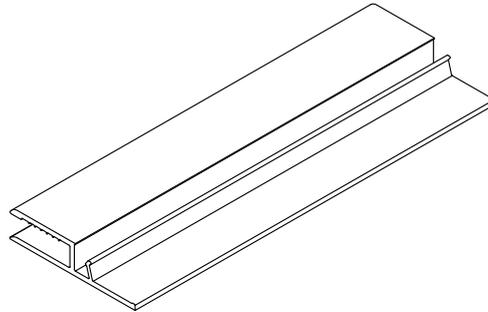



Quantity in the package: 20 x 6mt =120 meters

Profile Code	White / Without Rubber	<input type="radio"/>	40106- 04000
	White / With Rubber	<input checked="" type="radio"/>	*****
	Brown / Without Laminate	<input type="radio"/>	40106- 24000
	Gray / Without Laminate	<input type="radio"/>	40106- 64000
	*****	<input type="radio"/>	*****
	*****	<input type="radio"/>	*****

Without Rubber With Rubber

Sill (border) Profile - 50x70 mm

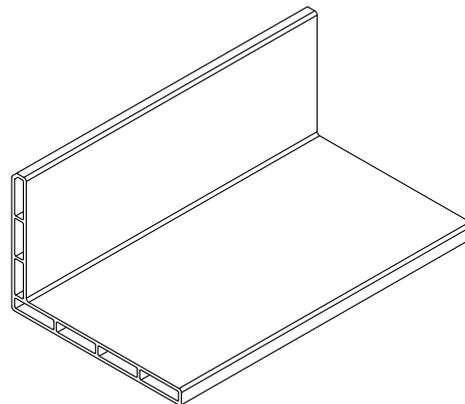
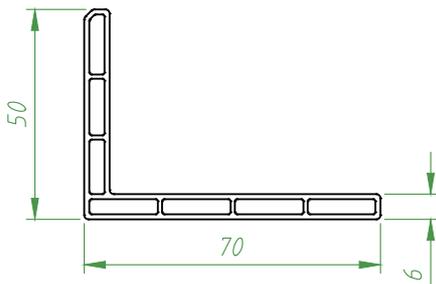


Quantity in the package: 12 x 6mt =72 meters

Profile Code	White / Without Rubber	<input type="radio"/>	40108- 02000	Inside	Outside
	White / With Rubber	<input checked="" type="radio"/>	*****	Lmainate	Lmainate
	Brown Laminate / Golden Oak	<input type="radio"/>	40108- 22001	*****	*****
	Brown Laminate / Dark Oak	<input type="radio"/>	40108- 22031	*****	*****
	Brown Laminate / Charcoal Brown	<input type="radio"/>	40108- 22051	*****	*****
	Gray Laminate / Wintech Gray	<input type="radio"/>	40108- 22061	*****	*****

Without Rubber With Rubber

Sill (border) Profile - 30x48 mm

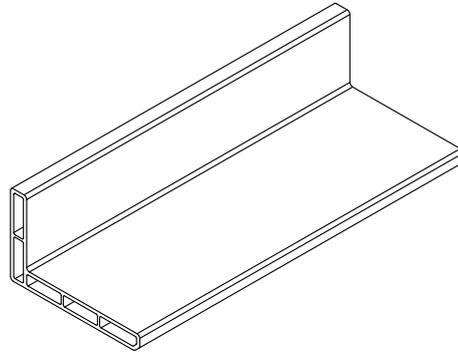



Quantity in the package: 12 x 6mt = 72 meters

Profile Code	White / Without Rubber	White / With Rubber	40108- 01000	Inside Lmainate	Outside Lmainate
	<input type="radio"/>	<input checked="" type="radio"/>	*****		
	<input type="radio"/>	<input type="radio"/>	40108- 21001	*****	*****
	<input type="radio"/>	<input type="radio"/>	40108- 21031	*****	*****
	<input type="radio"/>	<input type="radio"/>	40108- 21051	*****	*****
	<input type="radio"/>	<input type="radio"/>	40108- 21061	*****	*****

Without Rubber With Rubber

Panel Profile (20 x 125 mm)

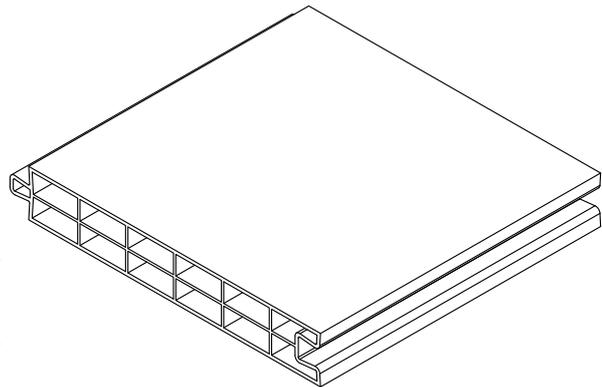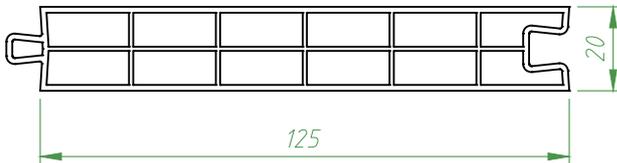


Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	White / With Rubber	40102- 04000	One side Lmainate *
	<input type="radio"/>	<input checked="" type="radio"/>	*****	
	<input type="radio"/>	<input type="radio"/>	40102- 24003	40102- 04003
	<input type="radio"/>	<input type="radio"/>	40102- 24033	40102- 04033
	<input type="radio"/>	<input type="radio"/>	40102- 24053	40102- 04053
	<input type="radio"/>	<input type="radio"/>	40102- 24063	40102- 04063

Without Rubber With Rubber


Panel Profile (20 x 125 mm- Groove)

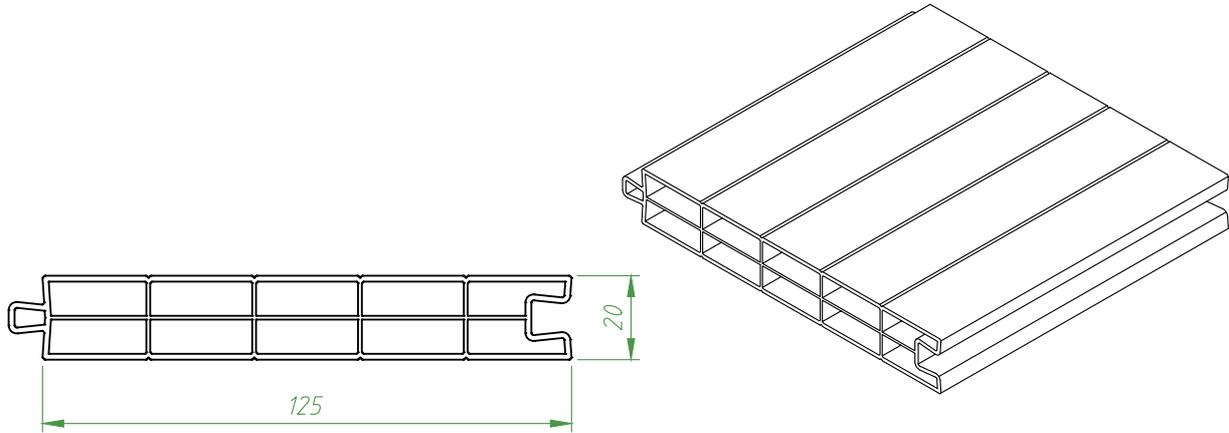

Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	<input type="radio"/>	40102- 02000	One side
	White / With Rubber	<input checked="" type="radio"/>	*****	Lmainate
	Brown Laminate / Golden Oak	<input type="radio"/>	40102- 22003	40102- 02003
	Brown Laminate / Dark Oak	<input type="radio"/>	40102- 22033	40102- 02033
	Brown Laminate / Charcoal Brown	<input type="radio"/>	40102- 22053	40102- 02053
	Gray Laminate / Wintech Gray	<input type="radio"/>	40102- 22063	40102- 02063
<input type="radio"/> Without Rubber <input checked="" type="radio"/> With Rubber				



Panel Profile (20 x 100 mm)

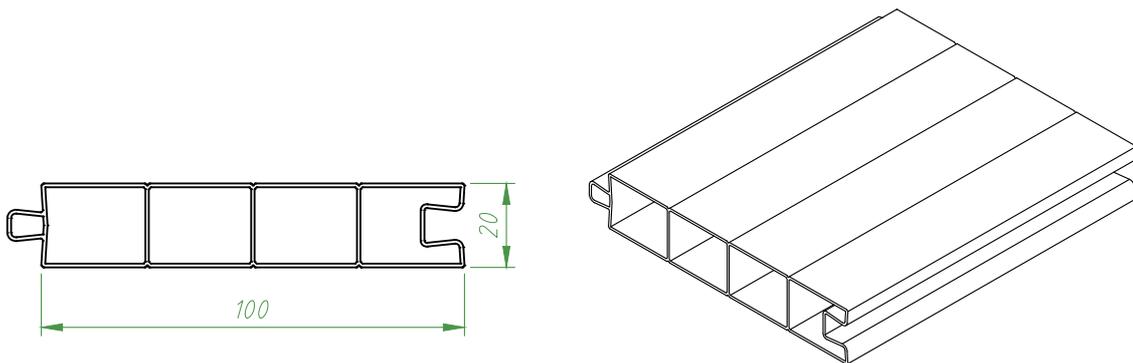

Quantity in the package: 6 x 6mt = 36 meters

Profile Code	White / Without Rubber	<input type="radio"/>	40102- 03000	One side
	White / With Rubber	<input checked="" type="radio"/>	*****	Lmainate *
	Brown Laminate / Golden Oak	<input type="radio"/>	*****	*****
	Brown Laminate / Dark Oak	<input type="radio"/>	*****	*****
	Brown Laminate / Charcoal Brown	<input type="radio"/>	*****	*****
	Gray Laminate / Wintech Gray	<input type="radio"/>	*****	*****
<input type="radio"/> Without Rubber <input checked="" type="radio"/> With Rubber				



Galvanized Reinforcing Profile Systems

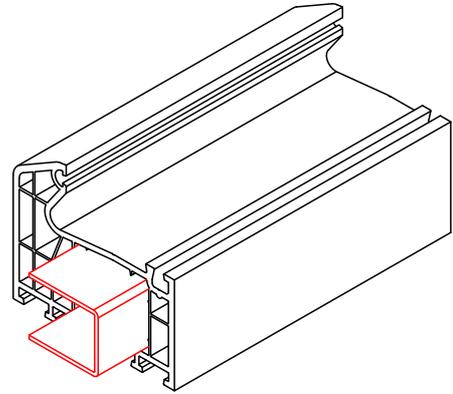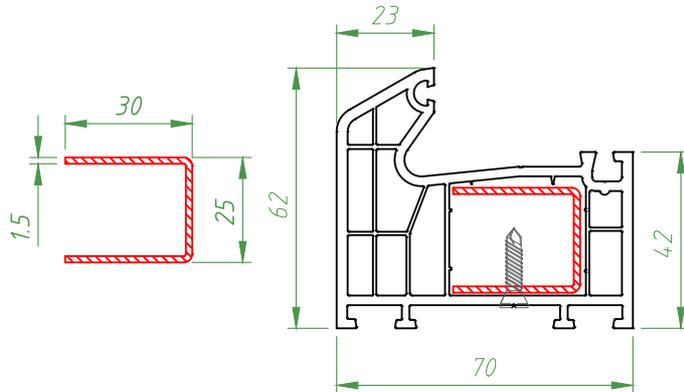

Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	0.96	1.15	101.6	797 gr /mt
1.5 mm	1.35	1.14	121.4	953 gr /mt
2 mm	1.70	1.48	159.4	1251 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.


Galvanized Reinforcing Profile Systems

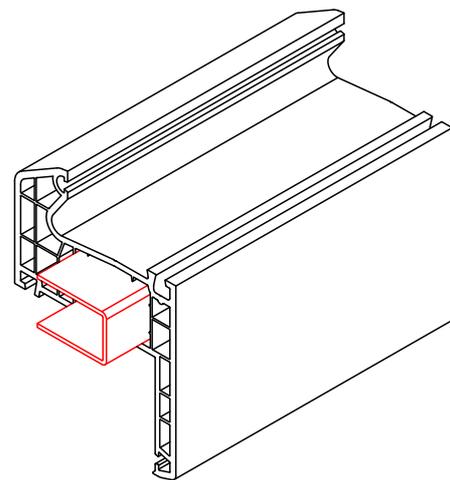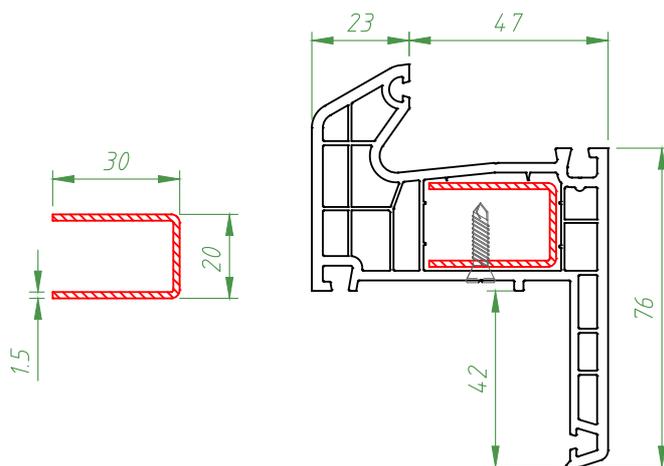

Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	0.70	0.89	95.39	749 gr /mt
1.5 mm	0.81	1.05	113.9	894 gr /mt
2 mm	1.02	1.36	149.4	1172 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.


Galvanized Reinforcing Profile Systems

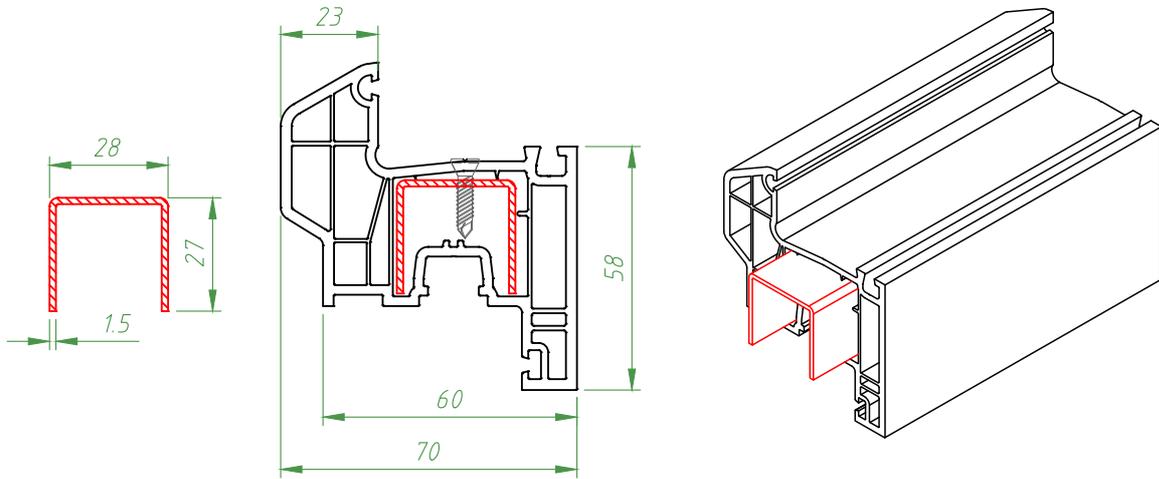

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.75	1.35	97.9	768 gr /mt
1.5 mm	0.89	1.58	116.8	916 gr /mt
2 mm	1.15	2.01	153.4	1204 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.


Galvanized Reinforcing Profile Systems

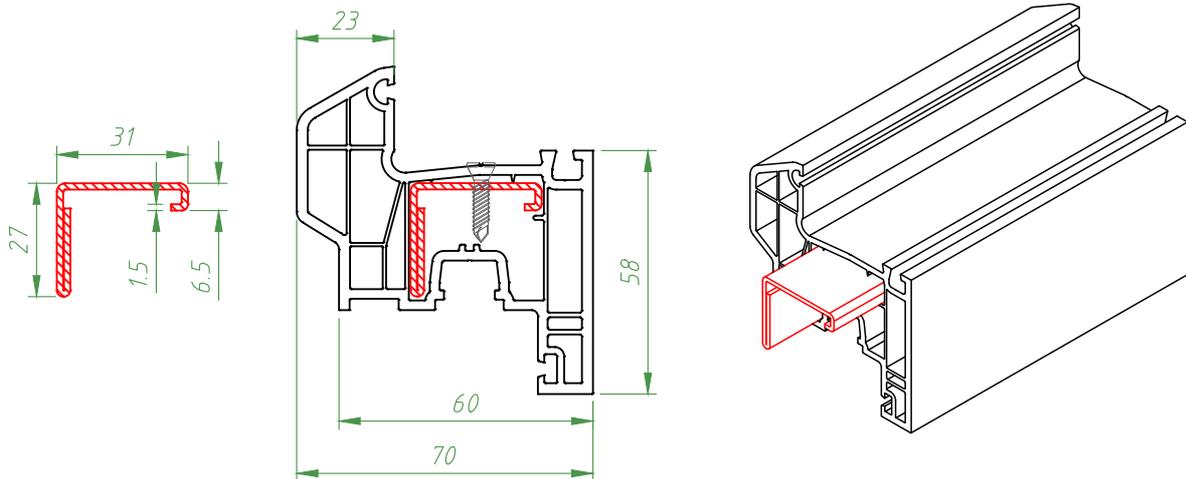

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.38	1.56	104.3	818 gr /mt
1.5 mm	0.45	1.83	124.8	980 gr /mt
2 mm	0.6	2.30	168.3	1321 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.


Galvanized Reinforcing Profile Systems

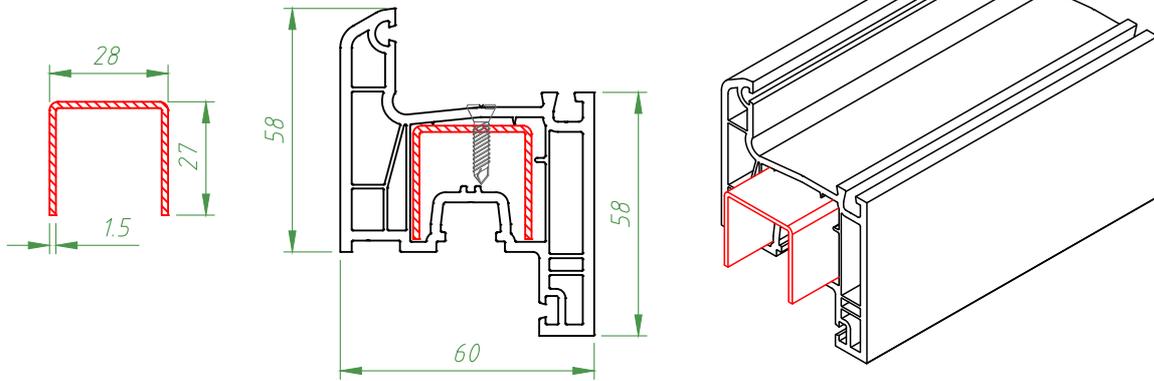

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.75	1.35	97.9	768 gr /mt
1.5 mm	0.89	1.58	116.8	916 gr /mt
2 mm	1.15	2.01	153.4	1204 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

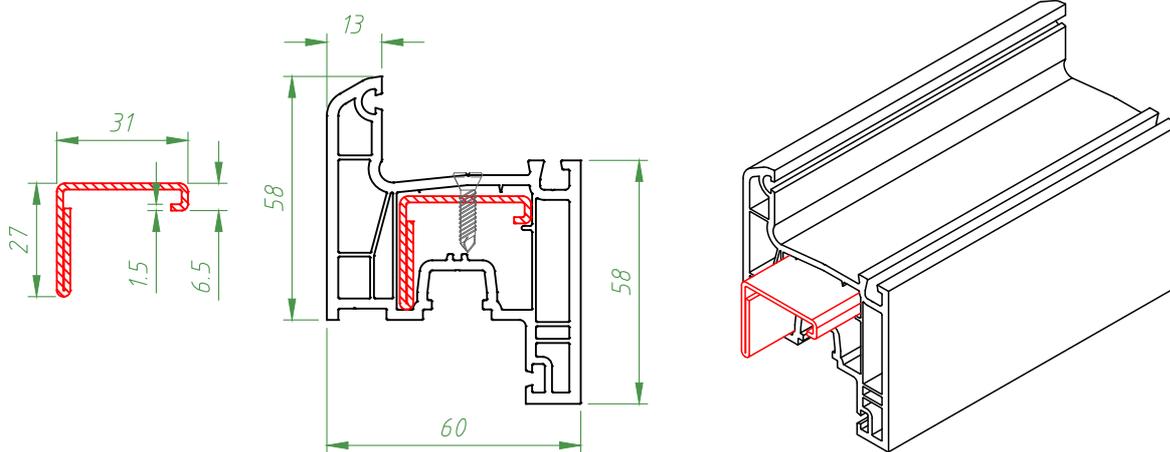

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.38	1.56	104.3	818 gr /mt
1.5 mm	0.45	1.83	124.8	980 gr /mt
2 mm	0.6	2.30	168.3	1321 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

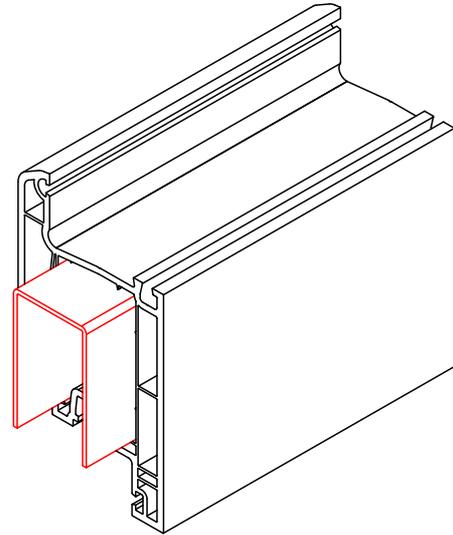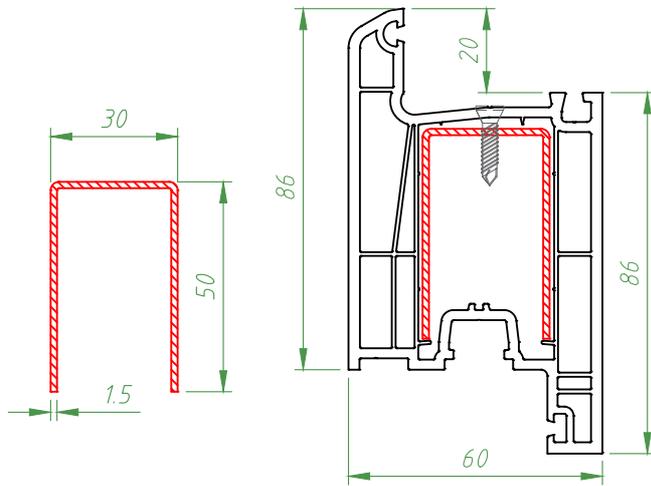

Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	4.15	2.76	157.9	1240 gr /mt
1.5 mm	4.93	3.26	188.9	1483 gr /mt
2 mm	6.44	4.16	249.4	1958 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

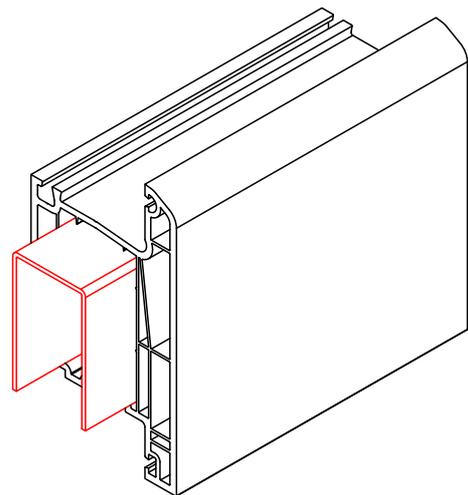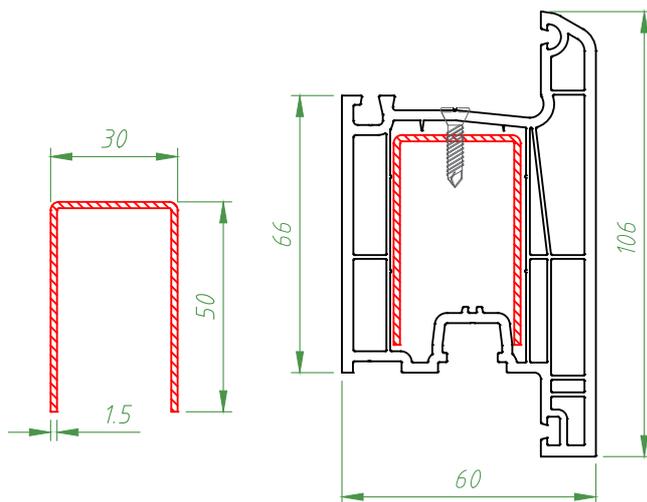

Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	4.15	2.76	157.9	1240 gr /mt
1.5 mm	4.93	3.26	188.9	1483 gr /mt
2 mm	6.44	4.16	249.4	1958 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

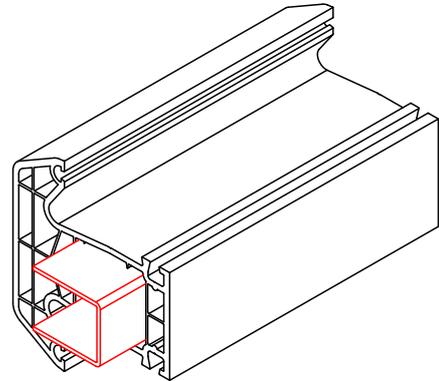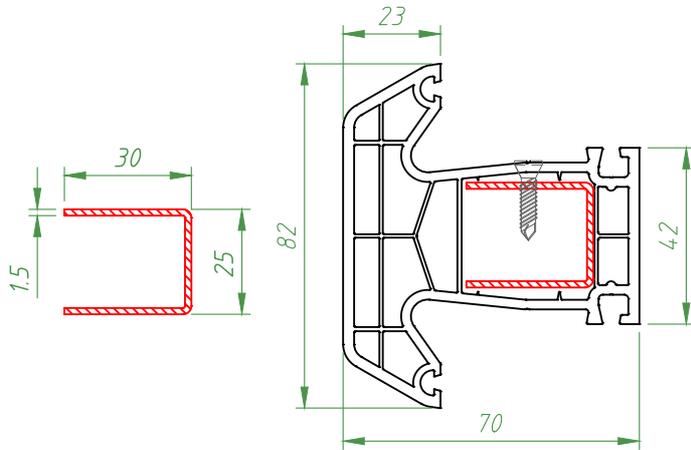

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.96	1.15	101.6	797 gr /mt
1.5 mm	1.35	1.14	121.4	953 gr /mt
2 mm	1.70	1.48	159.4	1251 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

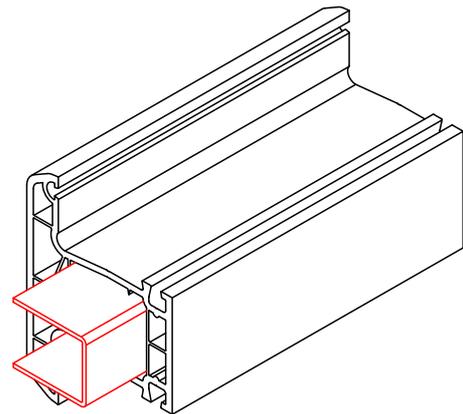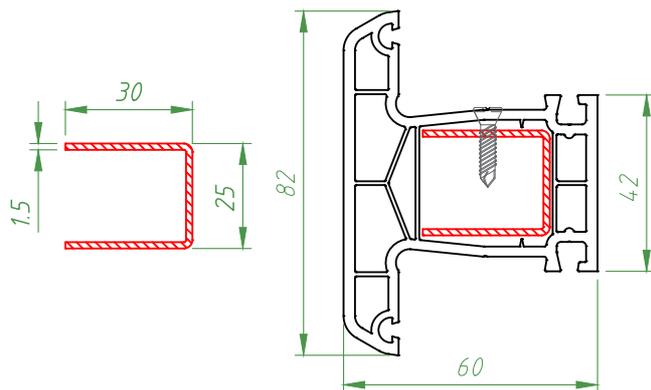

Thickness	I_x (cm) ⁴	I_y (cm) ⁴	Area	Weight
1.25 mm	0.96	1.15	101.6	797 gr /mt
1.5 mm	1.35	1.14	121.4	953 gr /mt
2 mm	1.70	1.48	159.4	1251 gr /mt

Reinforced profiles with a thickness of less than 1.25 mm are not approved.



Galvanized Reinforcing Profile Systems

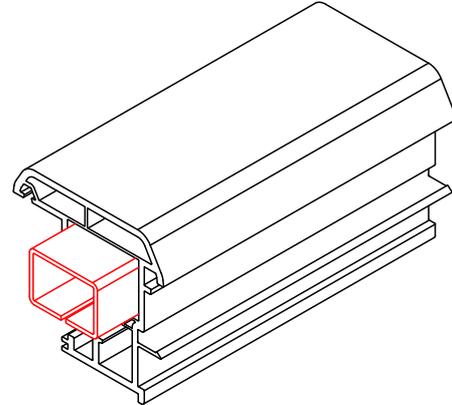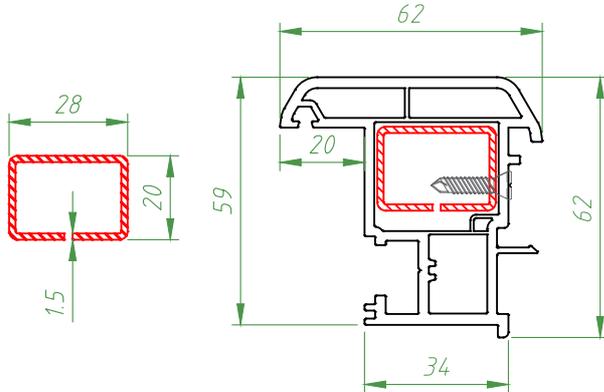

Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	0.72	1.26	116.5	914 gr /mt
1.5 mm	1.78	1.38	128.7	1010 gr /mt
2 mm	0.96	1.72	166.8	1310 gr /mt





Reinforced profiles with a thickness of less than 1.25 mm are not approved.





Galvanized Reinforcing Profile Systems


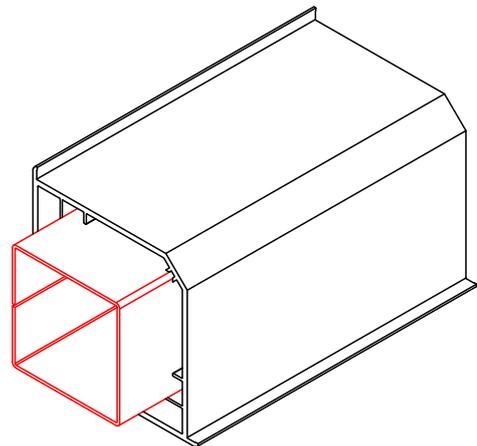
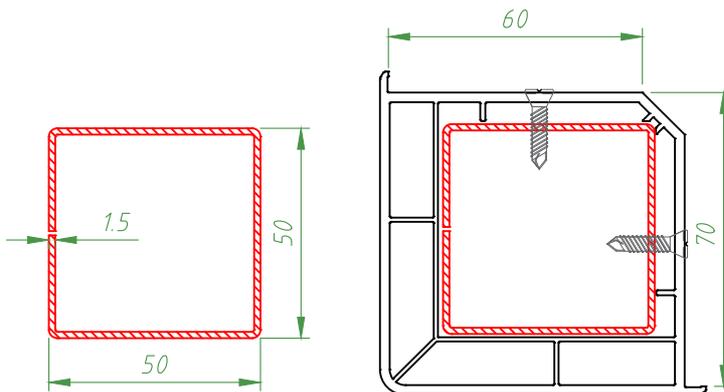






Thickness	Ix (cm) ⁴	Iy (cm) ⁴	Area	Weight
1.25 mm	9.51	9.43	240	1884 gr /mt
1.5 mm	11.22	11.13	286.2	2246 gr /mt
2 mm	14.46	14.34	376	2951 gr /mt





Reinforced profiles with a thickness of less than 1.25 mm are not approved.

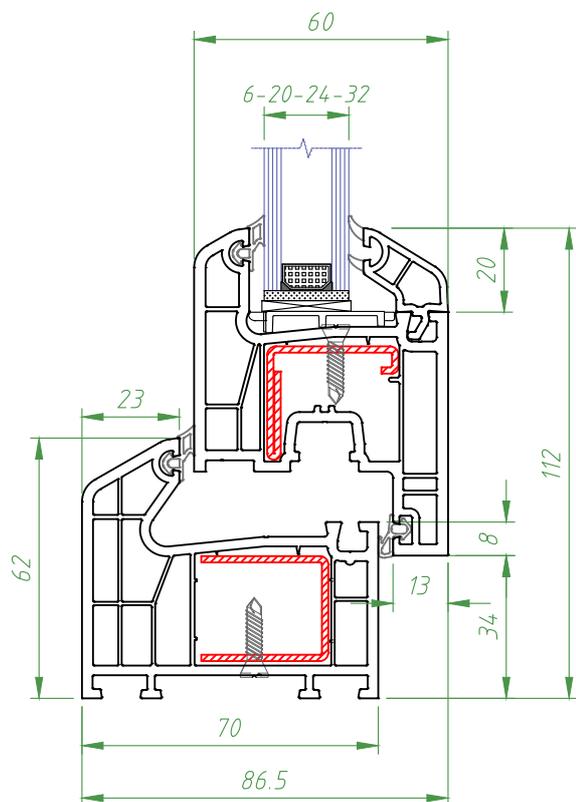


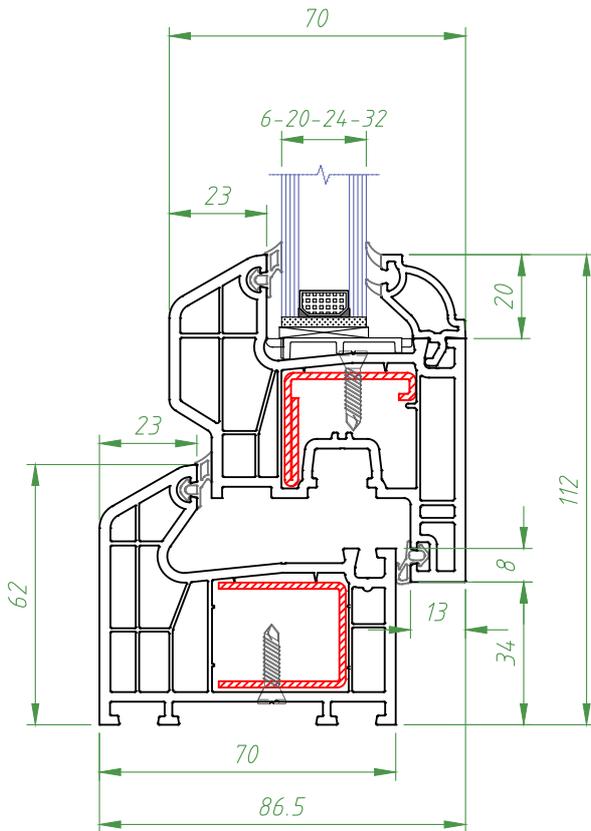



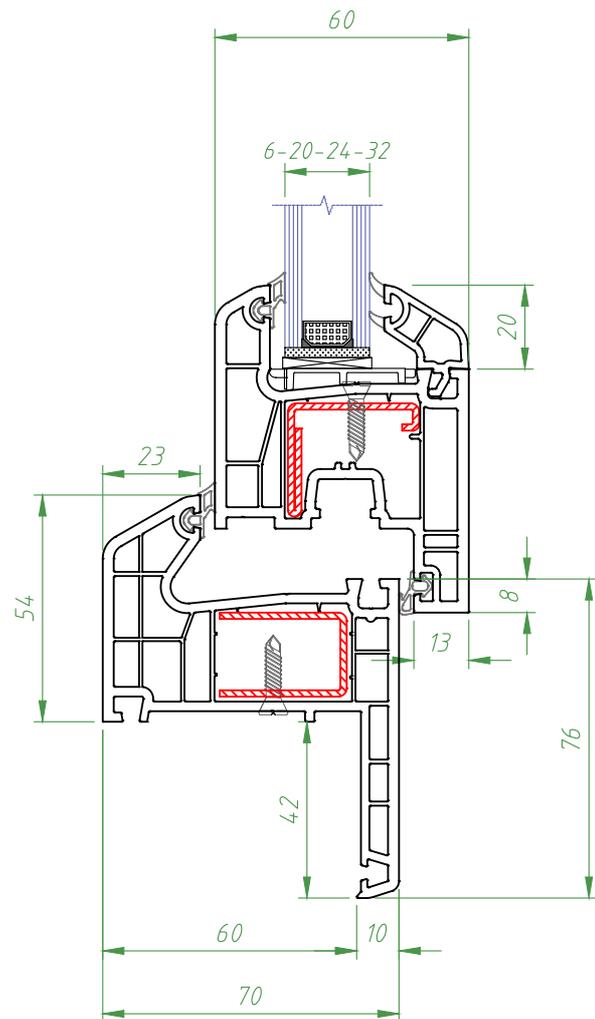

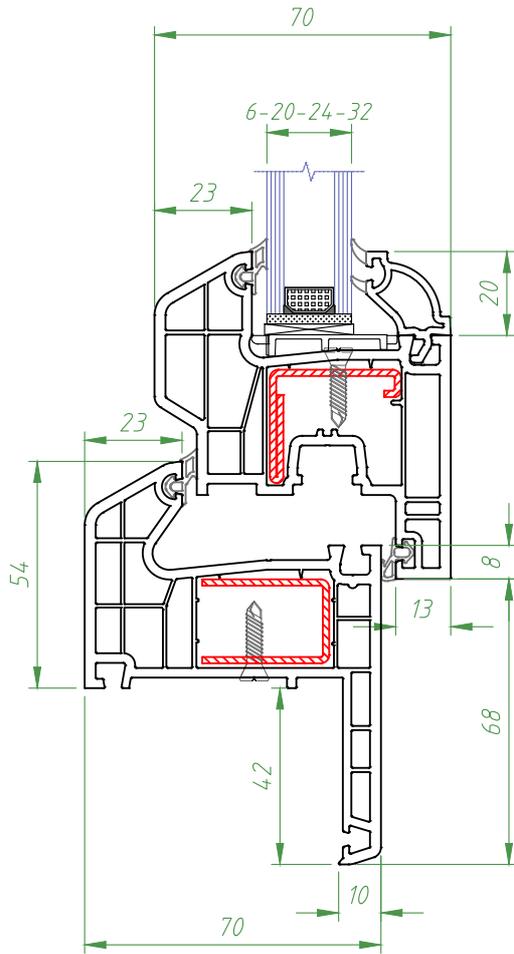


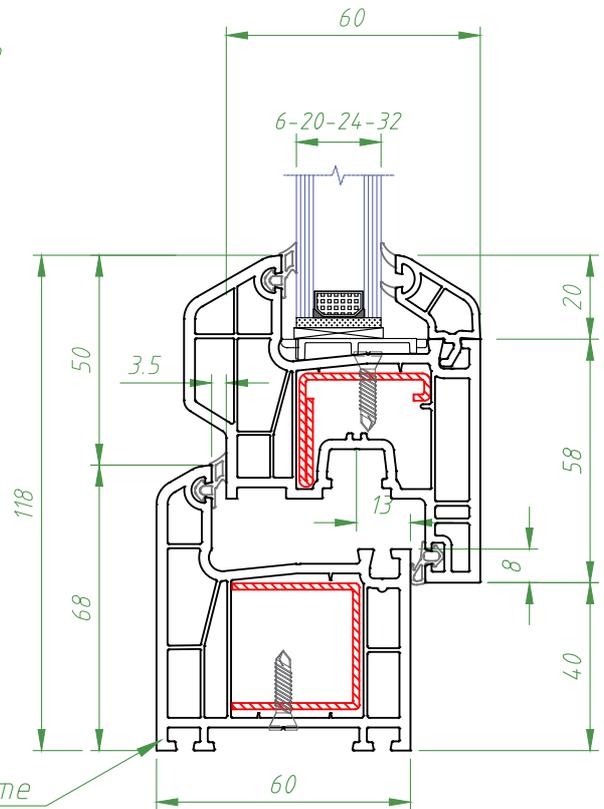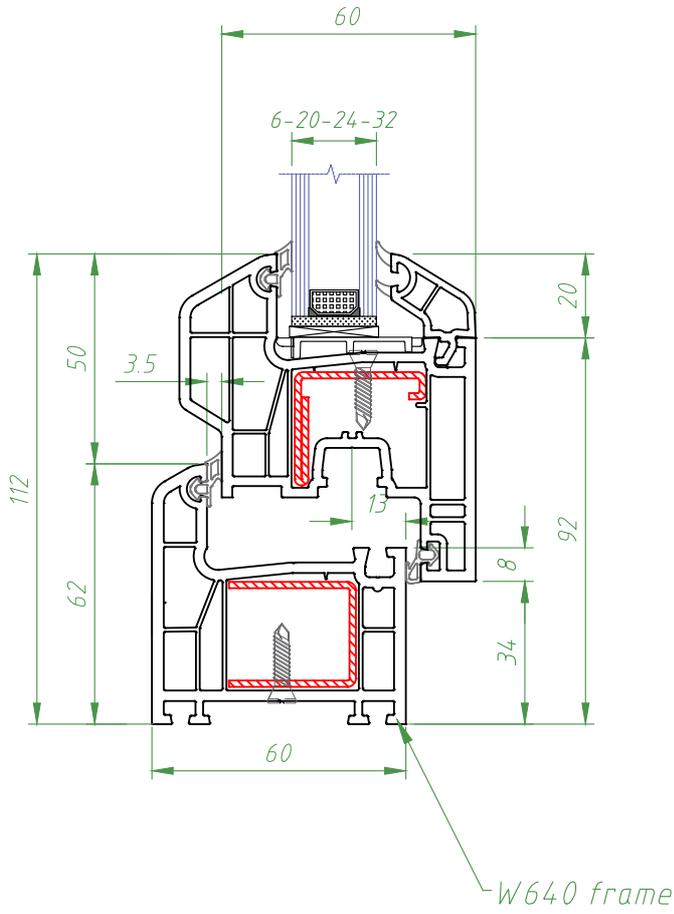




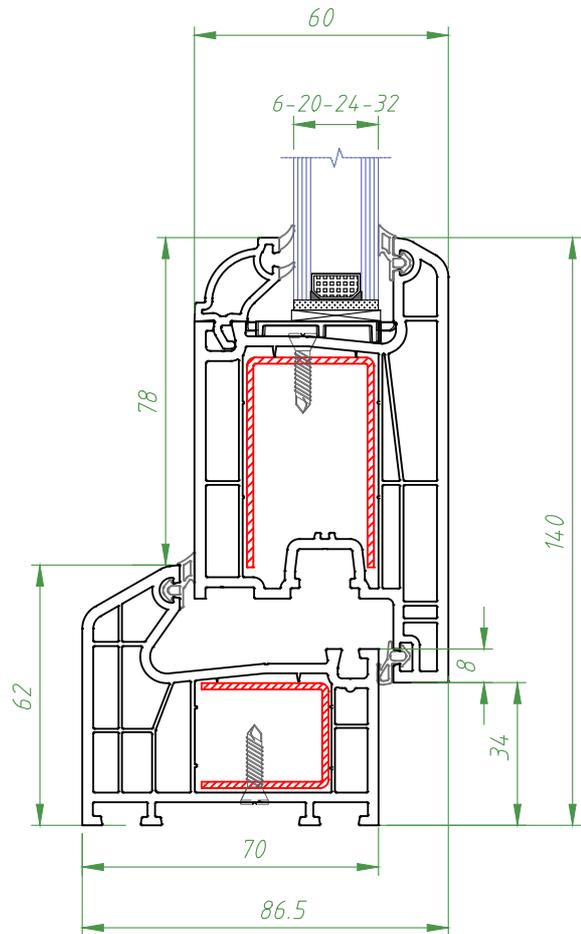

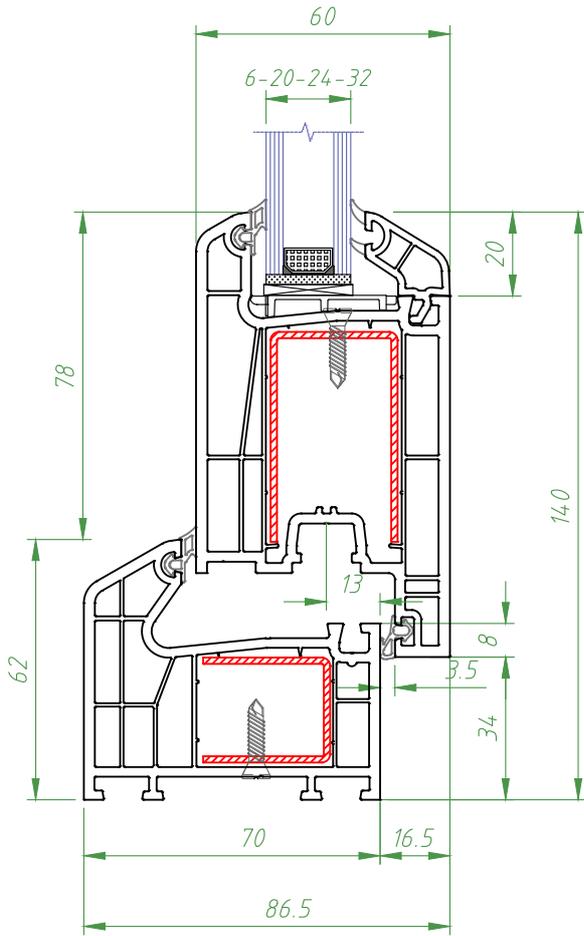



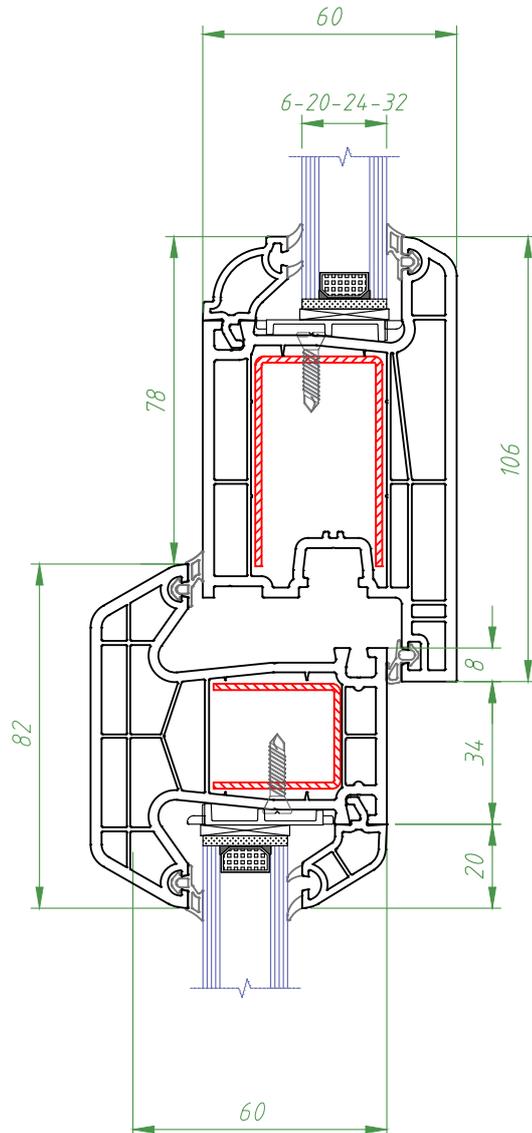


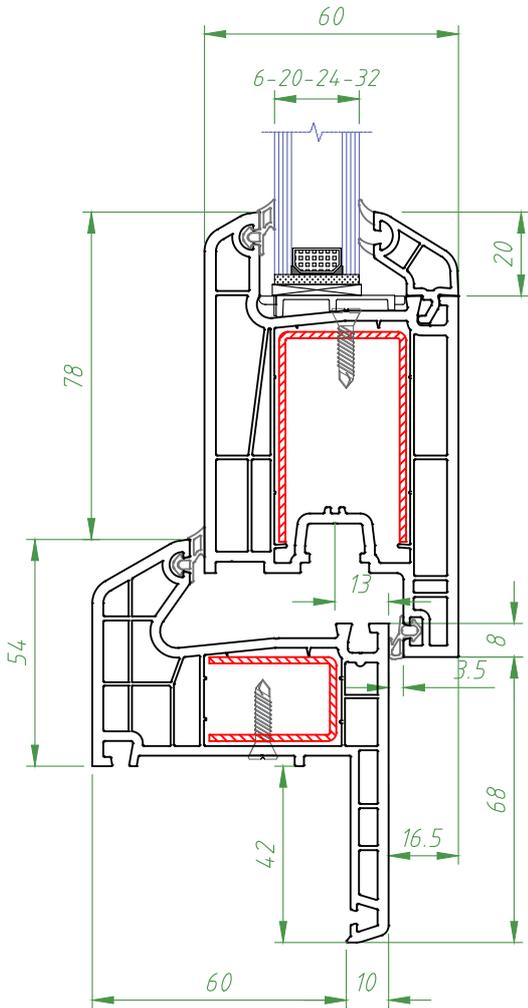


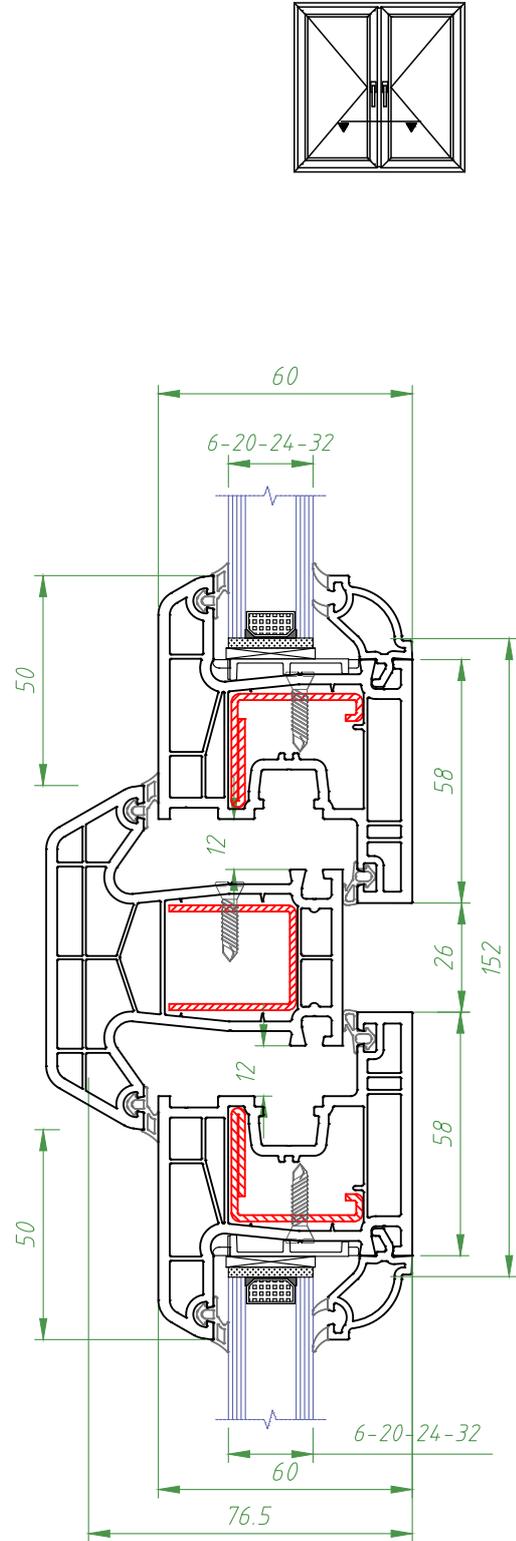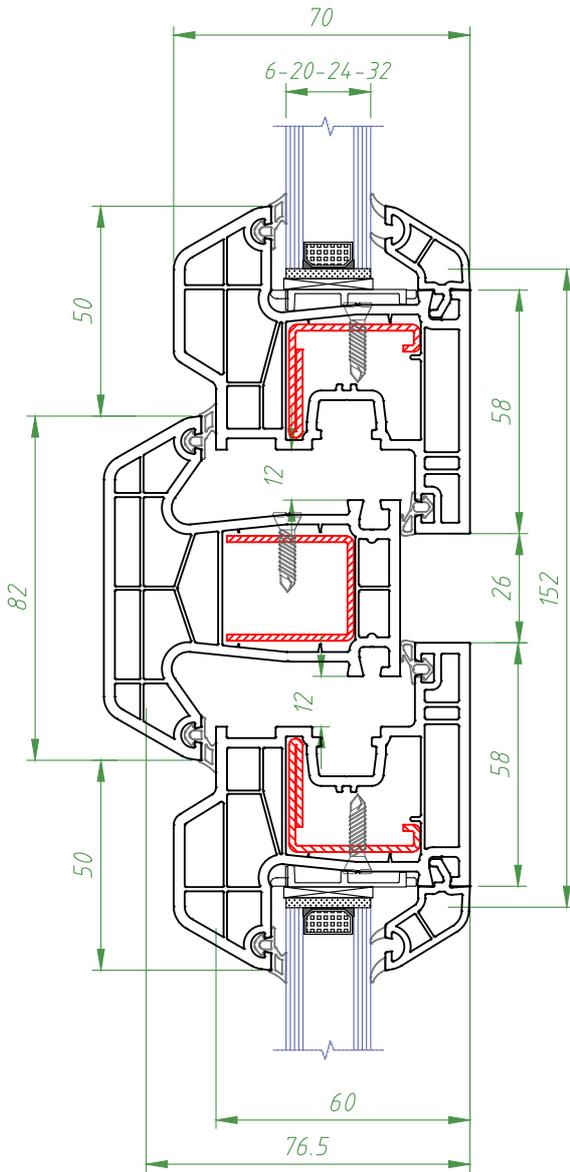


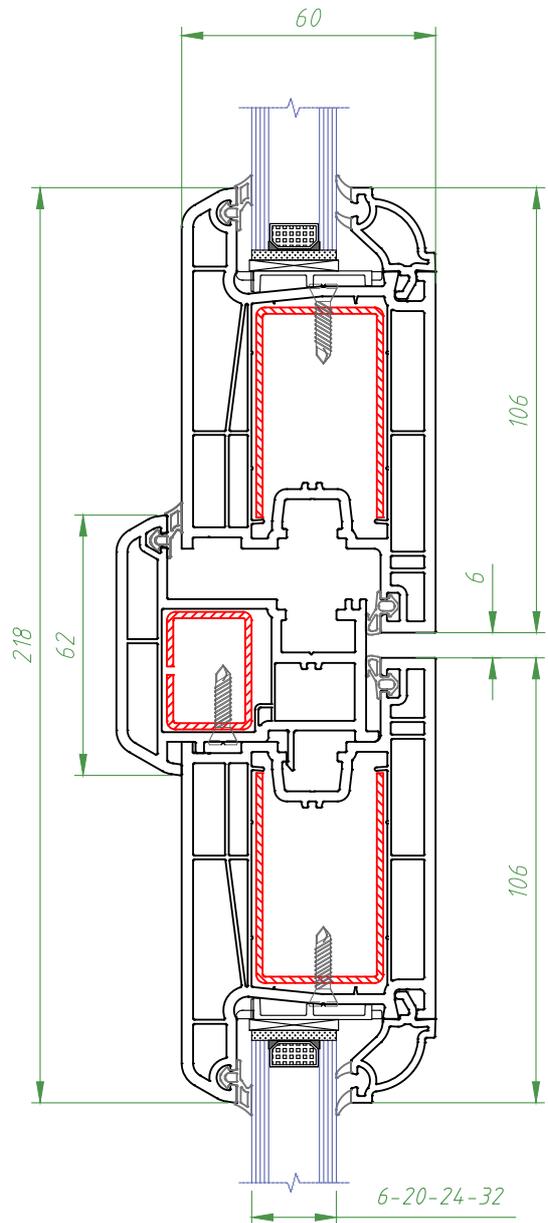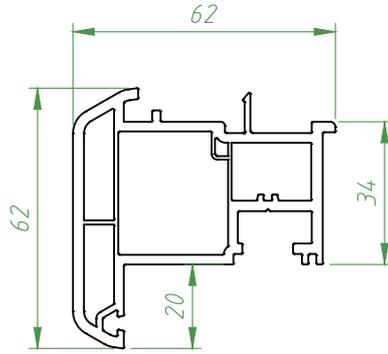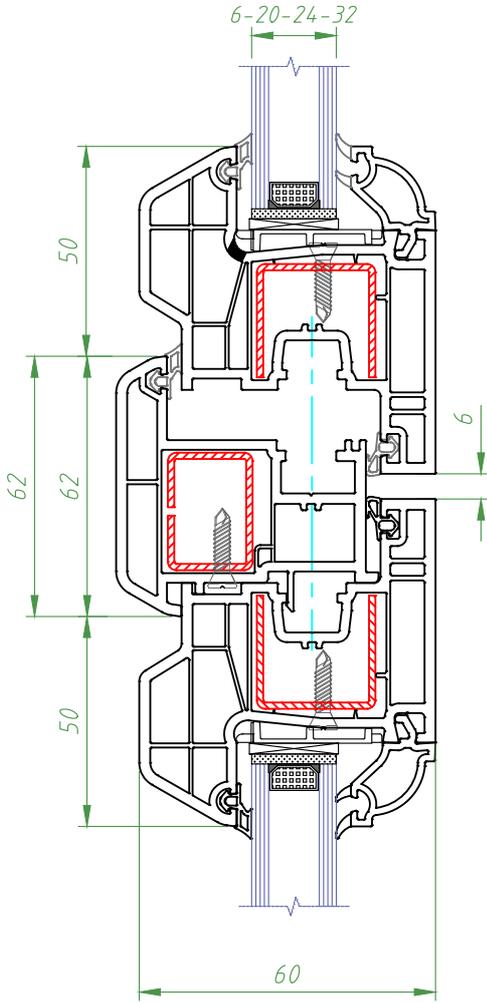

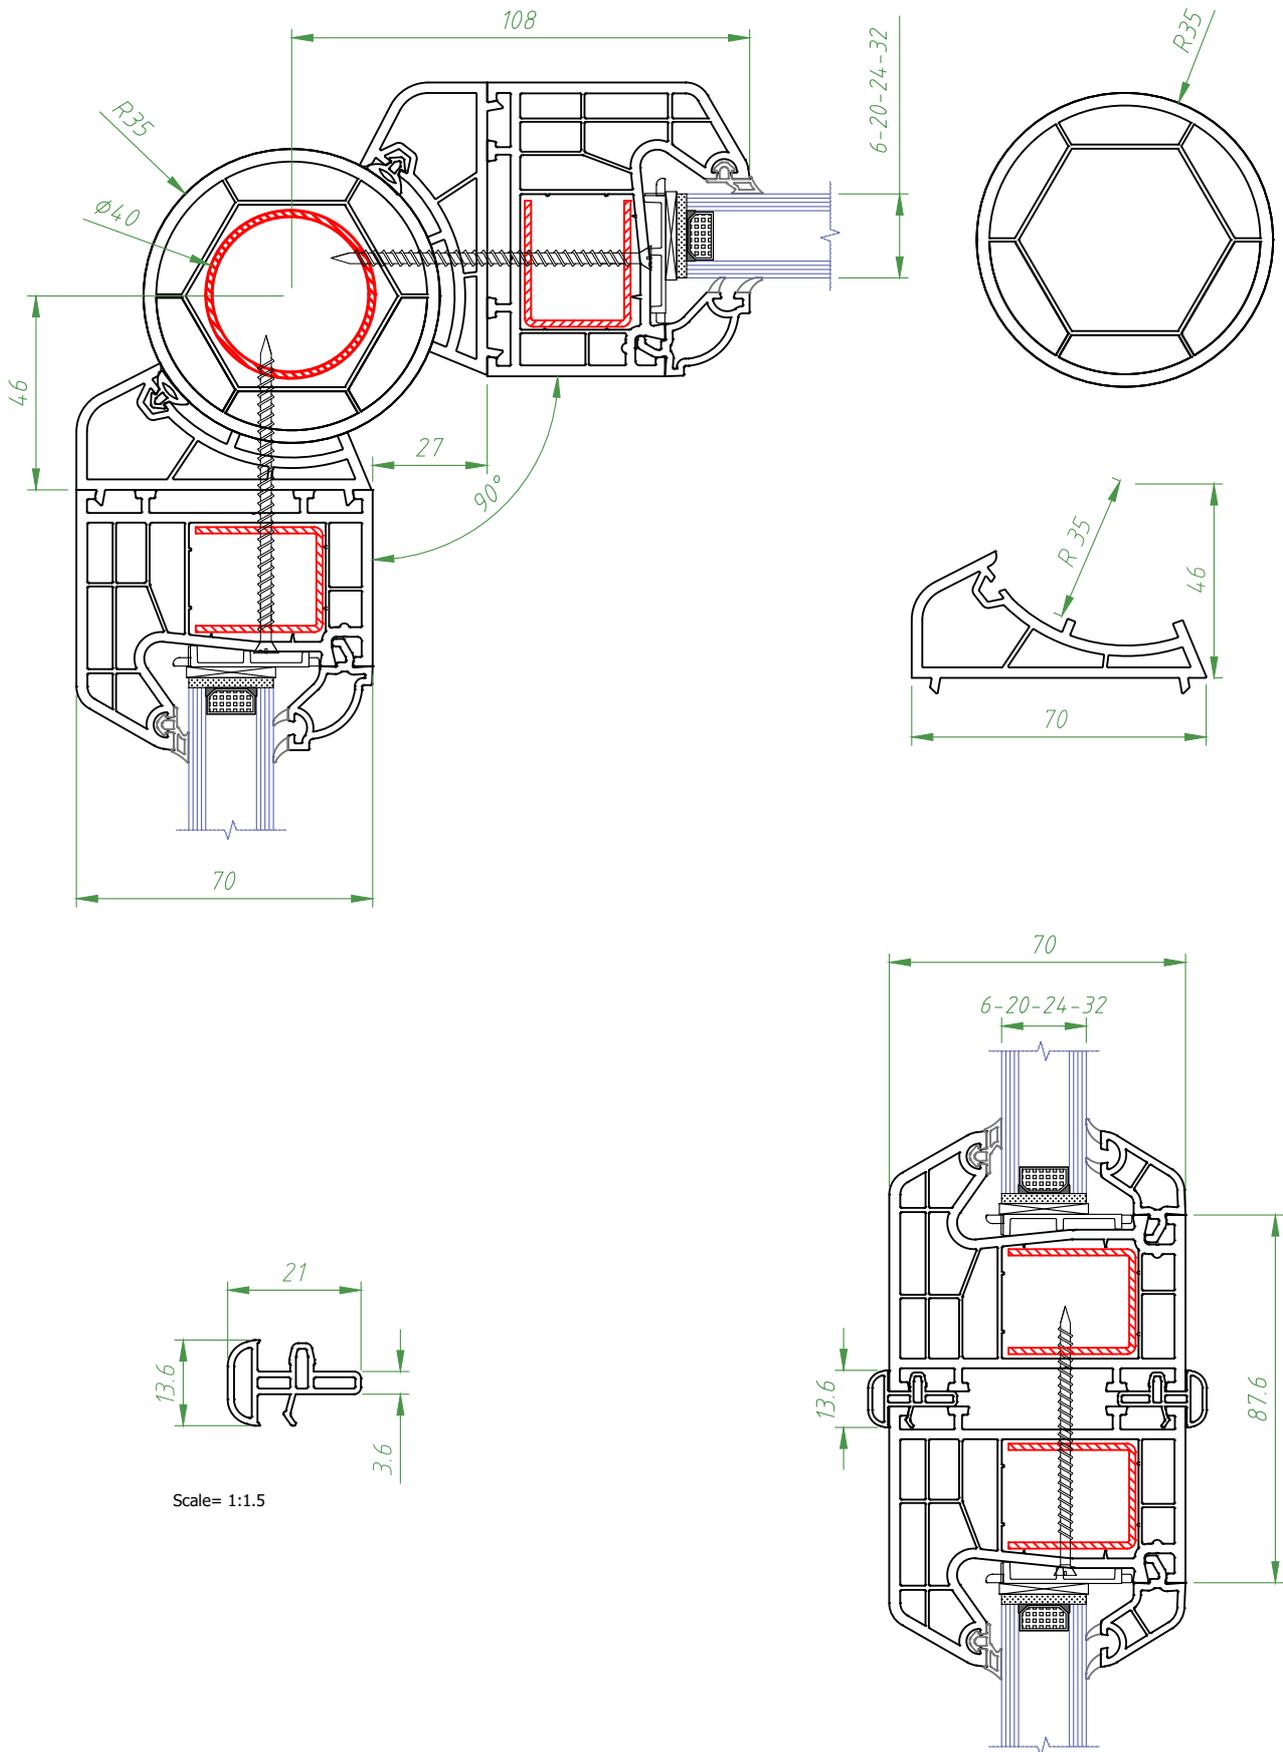


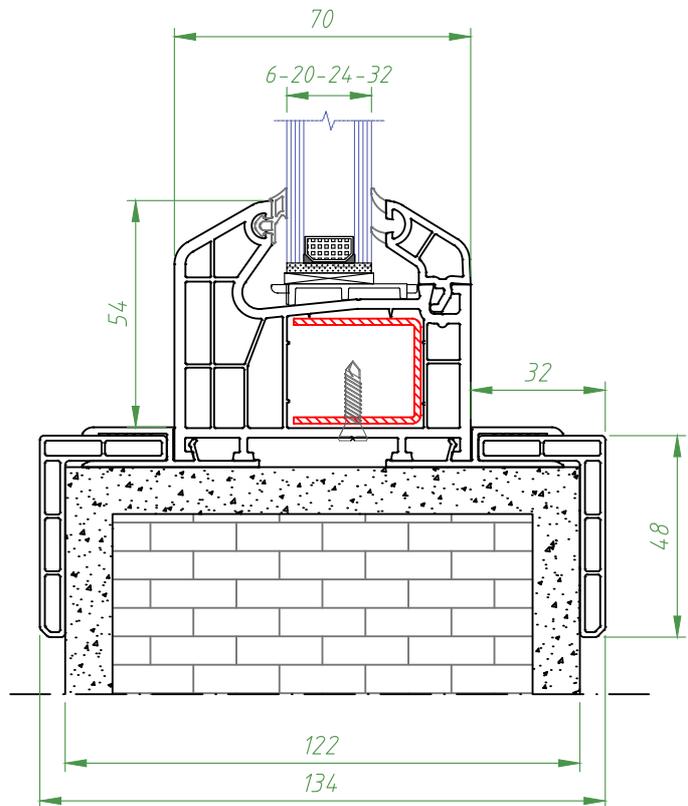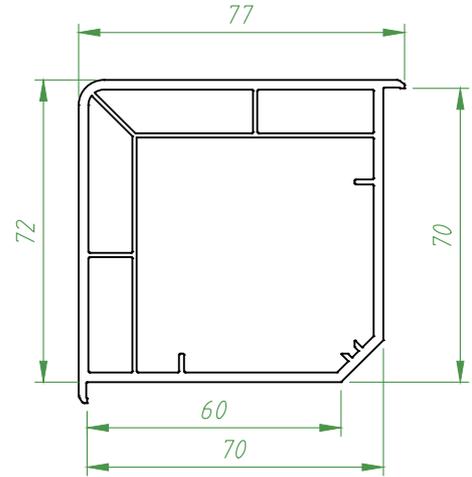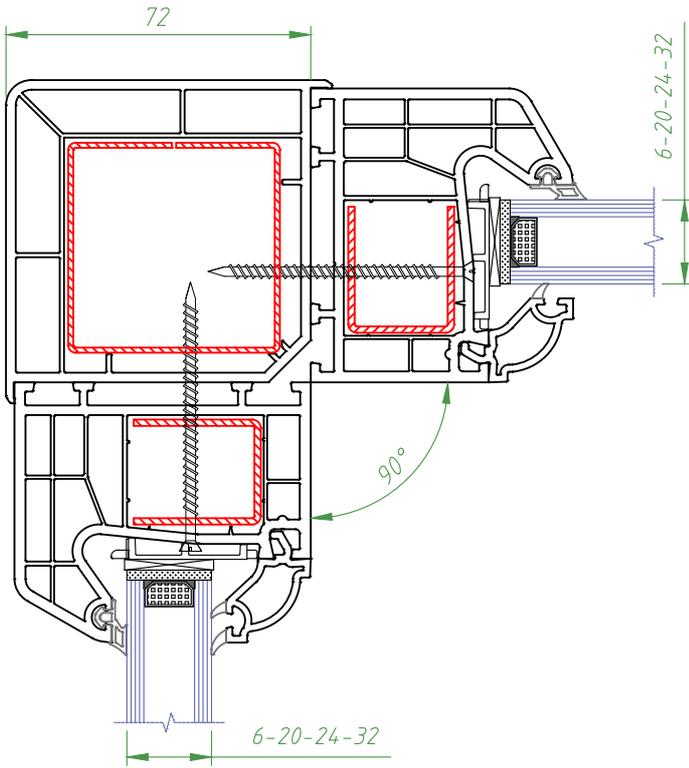

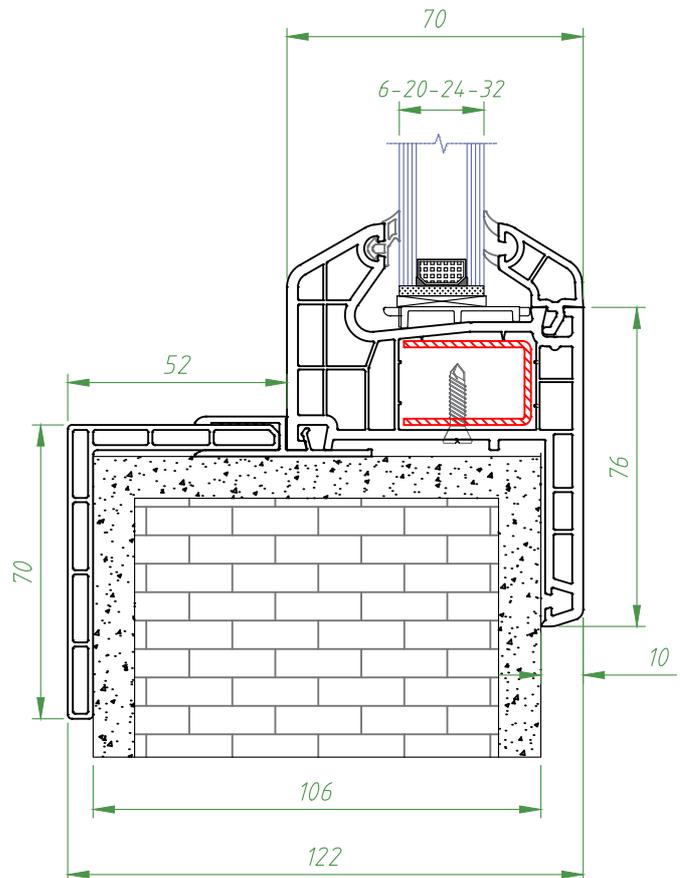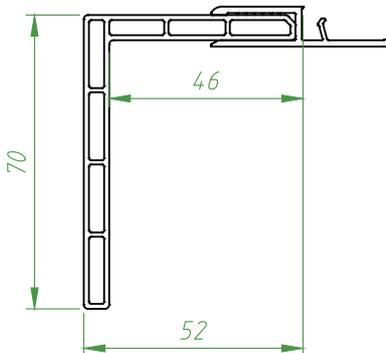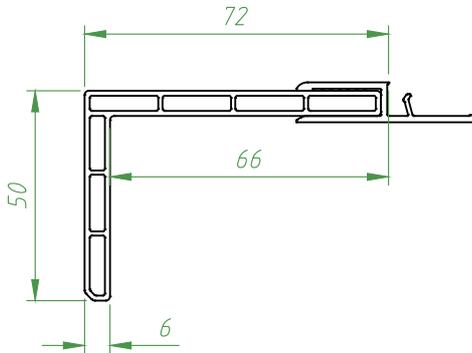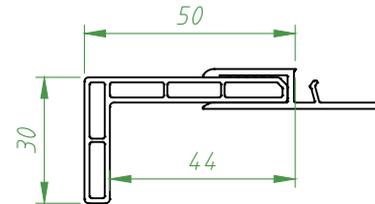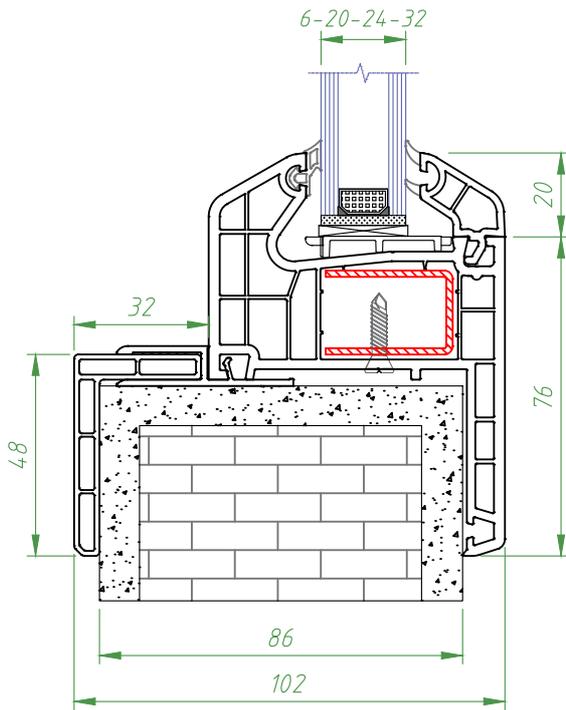





Single Glazed Bead 4 - 6 mm

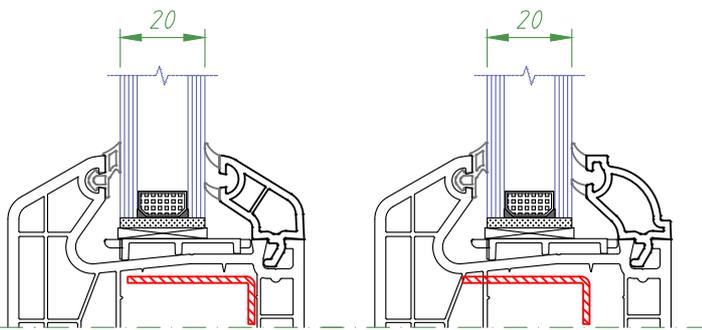

Double Glazed Bead 20 mm



Double Glazed Bead 24 mm



Triple Glazed Bead 32 mm

STATIC CALCULATION

General Information :

According to DIN 18056 standard, the mechanical strength of the corner fittings for an area larger than 9 meters or an area where the smaller part is greater than 2 meters should be calculated without any exceptions. There is usually no need to figure out these calculations for windows that are installed at short distances on the wall. However, vertical and horizontal intermediate components and interfaces should always be calculated.

In DIN 18056, the maximum deviation for these is given below:

For a thickness that has a storage space of up to 300 cm. Distance from space $F=L/200$

For the thickness of the storage space that is greater than 300 cm Distance from space $F=L/300$

Space is used when the insulated glass is used. production values are used, but the general rule is the distance from the space : $F=L/300$.


CALCULATION OF WINDOW:

a = Height of Loading cm

L = Distances Between Abutments cm


W = Wind Load : $c.q$ (kN\m)

J = Moment of Inertia

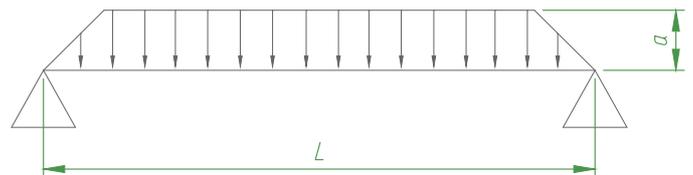

category of forcing	height of buliding	wind speed	dynamic pressure (Q)		multiplied with coefficient $c=1.2$ $p=cxQ$ F		multiplied with coefficient $c=1.2$ $p=cxQ$ G		factor of changing
	mt	m/s	kp/m ²	KN/m ²	kp/m ²	KN/m ²	kp/m ²	KN/m ²	
A	0-8	28.3	50	0.5	60	0.6	60	0.6	1.00
A	8-20	35.8	80	0.8	96	0.96	96	0.96	1.6
A	20-100	42	110	1.1	132	1.32	132	1.32	2.2
A	> 100	45.6	130	1.3	156	1.56	156	1.56	2.6

CALCULATION IS PERFORMED WITH THE HELP OF A SAMPLE

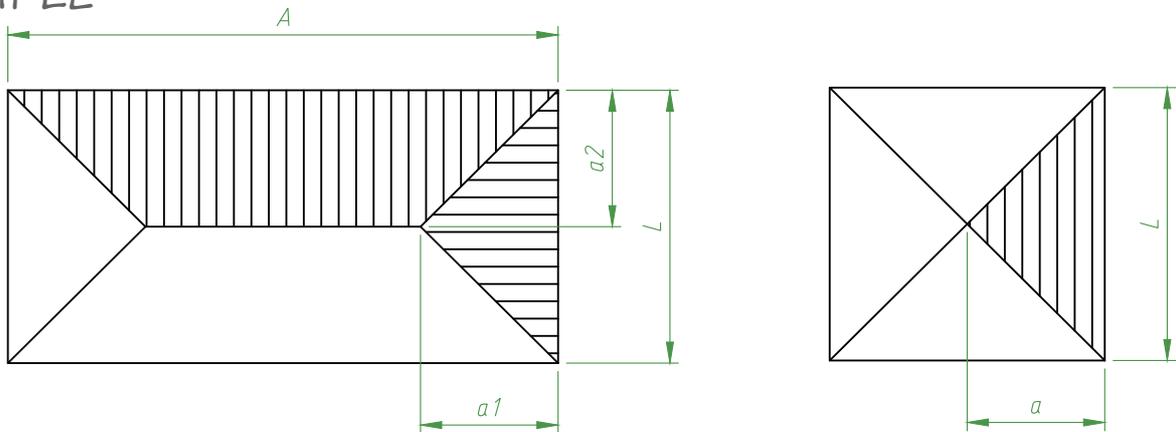


a = Width of Loading

L = Distance between Abutments

The distance between the supports (L) is the length of the floating rod. Width A is calculated assuming that a cross-section of 4 triangles is located on the square at the point of intersection.

There are loads of two triangles and two ropes on the rectangle.

SKETCH OF LOAD DISTRIBUTION ON WINDOW WITH VERTICAL AND MULLION PROFILE

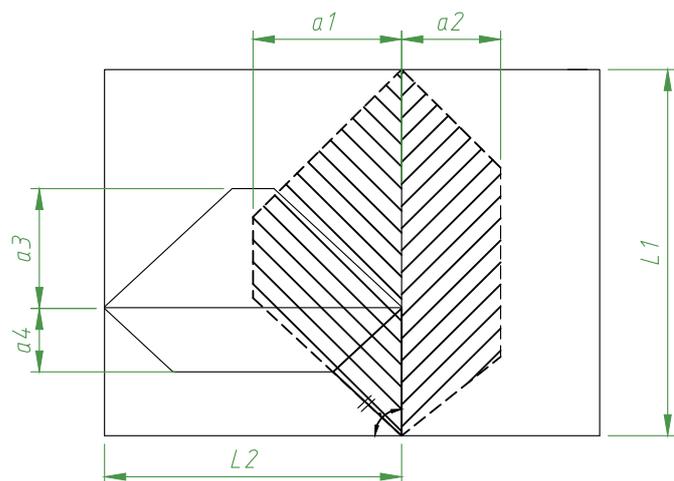

a = Width of Loading (cm)

L = Distance of Abutment (cm)

If the graphic is drawn with scale, " a " is defined as width of loading.

The group that belongs to the load depends on the height of the building where the window will be installed.

For an example;

if the building has an altitude of 18 meters, this will include group B and all windows are accepted from the ground up to 18 meters for group B and the required computing will follow.

STATIC CALCULATION

Longevity and strength of the window against wind force against the UPVC window profile and the inertia of the reinforced (I_y , I_x) galvanizing profile are used in the production of the product. The main function of the reinforcing profiles used in doors and windows made of flexible PVC is used. It is a requirement to provide mechanical strength requirements that enable the corner fittings of the door and PVC windows to function properly.


The shape and thickness of the reinforcement profiles are used to determine the maximum size of the window, in addition to the height at which the quadrilateral is installed and the wind power is also associated.

General rules:

Maximum bale Exterior Size in Figure.

The largest portion required is given as M.

The weight of the glass or panel is up to 25 kg / m, while the maximum measurements are inaccurate and inaccurate. Limitations imposed by the company providing the gallon should also be considered.

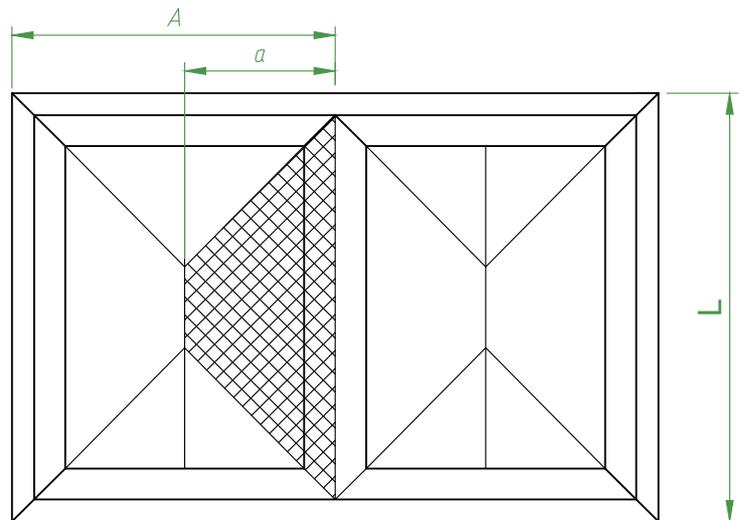

$I_x = \frac{W^4 \cdot L \cdot a}{1920 \cdot E \cdot f} \left(25 - 40 \left(\frac{a}{L} \right)^2 + 16 \left(\frac{a}{L} \right)^4 \right)$
I_x = Required Moment of Inertia (cm ⁴)
W = Wind Load (N/mm) ²
E = Modulus of Elasticity (E = 2600 N/mm ² / E = 210.000N/mm ²)
f = Allowable Deflection (L / 300) cm
a = Width of Loading (cm)
L = Space of Abutment (cm)

0 - 8 m	60 kp/m ²	600 pa	0.0006 N/mm ²
8 - 20 m	96 kp/m ²	960 pa	0.00096 N/mm ²
20 - 100 m	132 kp/m ²	1320 pa	0.00132N/mm ²
> 100 m	156 kp/m ²	1560 pa	0.00156 N/mm ²

MODULUS OF ELASTICITY
= 210.000 N/MM²

Height Of Assembly = 0-8 mt
Wind Pressure 60 kp/ m

SELECT OF CORRECT T PROFILE WITH RESPECT TO WIND PRESSURE

L = height of sash (cm)	a = width of sash (cm) / a= A/2																		
	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
100	0.21	0.29	0.34																
110	0.28	0.39	0.48	0.52	0.54					110									
120	0.37	0.52	0.64	0.72	0.74	0.75													
130	0.47	0.67	0.84	0.95	1.01	1.22													
140	0.59	0.85	1.07	1.23	1.34	1.37													
150	0.73	1.06	1.34	1.56	1.72	1.80													
160	0.89	1.30	1.65	1.94	2.16	2.30	2.34												
170	1.07	1.56	2.00	2.38	2.67	2.87	2.97	3.03											
180	1.28	1.87	2.40	2.87	3.24	3.52	3.69	3.75											
190	1.50	2.21	2.85	3.42	3.89	4.26	4.51	4.64											
200	1.76	2.58	3.35	4.03	4.61	5.09	5.43	5.64	5.71										
210	2.04	3.00	3.90	4.71	5.42	6.01	6.46	6.77	6.93										
220	2.35	3.46	4.51	5.46	6.31	7.03	7.60	8.02	8.28	8.37									
230	2.68	3.96	5.17	6.29	7.28	8.15	8.86	9.41	9.78	9.97									
240	3.05	4.51	5.90	7.19	8.35	9.38	10.25	10.94	11.44	11.75	11.85								
250	3.60	5.32	6.97	8.51	9.92	11.17	12.25	13.13	13.81	14.27	14.50								
260	4.21	6.24	8.18	10.01	11.69	13.20	14.52	15.63	16.52	17.16	17.55	17.68							
270	4.90	7.27	9.54	11.69	13.68	15.49	17.09	18.46	19.59	20.44	21.02	21.32	270						
280	5.67	8.42	11.06	13.57	15.91	18.06	19.98	21.65	23.05	24.16	24.96	25.45	25.61						
290	6.53	9.70	12.76	15.67	18.41	20.93	23.21	25.22	26.93	28.33	29.4	30.12	30.48						
300	7.48	11.12	14.64	18.01	21.18	24.12	26.80	29.19	31.27	33.00	34.37	36.36	36.69	37.16					
310	8.53	12.69	16.72	20.59	24.25	27.66	30.79	36.09	37.62	38.20	39.92	41.23	42.11	42.55					
320	9.69	14.42	19.02	23.44	27.63	31.57	35.21	38.51	41.44	43.98	46.09	47.46	48.96	49.69	49.93				
330	10.97	16.33	21.54	26.57	31.36	35.58	40.07	43.90	47.34	50.36	52.92	56.00	56.58	57.64	58.17				
340	12.36	18.41	24.31	30.01	36.45	40.60	45.41	49.83	53.84	57.39	60.45	62.99	65.00	66.45	67.32	67.61			
350	13.88	20.69	27.33	33.76	39.92	45.77	51.26	56.34	60.97	65.11	68.73	71.80	74.29	76.17	77.44	78.08			

This moment of inertia chart is for double-glazed systems.

$f=H/500 \leq 0,8$ cm (Maximum permissible deviation)

Consult glass firms to determine type and features of the glass.

Thickness of the glass alters for different distances and heights.

MODULUS OF ELASTICITY
= 210.000 N/MM²

Height Of Assembly = 8-20 mt
Wind Pressure 96 kp/ m

SELECT OF CORRECT T PROFILE WITH RESPECT TO WIND PRESSURE

	a = width of sash (cm) / a = A/2																			
	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	
100	0.33	0.46	0.54	0.57						110										
110	0.45	0.63	0.76	0.83	0.87															
120	0.59	0.84	1.02	1.14	1.18															
130	0.76	1.08	1.34	1.52	1.62	1.67														
140	0.95	1.36	1.71	1.98	2.14	2.20														
150	1.17	1.69	2.14	2.50	2.75	2.88														
160	1.43	2.07	2.64	3.11	3.46	3.67	3.74													
170	1.72	2.50	3.21	3.80	4.27	4.59	4.75													
180	2.04	2.99	3.84	4.58	5.19	5.63	5.91	6.00												
190	2.41	3.53	4.56	5.46	6.22	6.81	7.22	7.42												
200	2.81	4.13	5.36	6.45	7.38	8.14	8.69	9.03	9.14											
210	3.28	4.80	6.24	7.54	8.67	9.61	10.34	10.83	11.08											
220	3.75	5.54	7.21	8.74	10.09	11.24	12.16	12.84	13.25	13.39										
230	4.29	6.34	8.28	10.06	11.66	13.04	14.18	15.06	15.65	15.95										
240	4.88	7.22	9.44	11.50	13.37	15.01	16.39	17.50	18.30	18.79	18.99									
250	5.75	8.52	11.15	13.62	15.87	17.87	19.60	21.02	22.1	22.83	23.21									
260	6.74	9.98	13.09	16.01	18.7	21.12	23.24	25.02	26.43	27.46	28.08	28.29								
270	7.84	11.63	15.27	18.70	21.89	24.78	27.35	29.54	31.34	32.71	33.64	34.11	270							
280	9.07	13.47	17.70	21.71	25.46	28.89	31.96	34.64	36.88	38.65	39.94	40.72	40.98							
290	10.45	15.52	20.41	25.08	29.45	33.48	37.13	40.35	43.09	45.33	47.03	48.18	48.76							
300	11.97	17.79	23.43	28.81	33.88	38.59	42.88	46.71	50.03	52.80	54.99	56.58	57.54	57.88						
310	13.66	20.31	26.76	32.94	38.79	44.26	49.27	53.78	57.75	61.13	63.87	65.96	67.37	68.08						
320	15.51	23.08	30.43	37.50	44.22	50.51	56.33	61.61	66.30	70.36	73.74	76.41	78.34	79.50	79.89					
330	17.54	26.12	34.47	42.51	50.18	57.40	64.11	70.24	75.75	80.57	84.67	88.00	90.52	92.22	93.07					
340	19.87	29.46	38.9	48.01	56.72	64.96	72.65	79.74	86.14	91.82	96.7	100.7	104.0	106.3	107.7	108.1				
350	22.21	33.10	43.73	54.02	63.88	73.24	82.01	90.14	97.55	104.1	109.9	114.8	118.8	121.8	123.9	124.9				

L = height of sash (cm)

This moment of inertia chart is for double-glazed systems.
 $f \leq H/300 < 0,8$ cm (Maximum permissible deviation)
 Consult glass firms to determine type and features of the glass.
 Thickness of the glass alters for different distances and heights.

MODULUS OF ELASTICITY
= 210.000 N/MM²

Height Of Assembly = 8 -20 mt
Wind Pressure 96 kp/ m

SELECT OF CORRECT T PROFILE WITH RESPECT TO WIND PRESSURE

L = height of sash (cm)	a = width of sash (cm) / a= A/2																			
	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	
100	0.46	0.63	0.75	0.79						110										
110	0.62	0.87	1.05	1.14	1.21															
120	0.81	1.15	1.41	1.57	1.63															
130	1.04	1.48	1.84	2.10	2.23	2.32														
140	1.30	1.88	2.35	2.72	2.94	3.20														
150	1.61	2.33	2.95	3.44	3.78	3.96														
160	1.96	2.58	3.63	4.27	4.75	5.05	5.15													
170	2.36	3.44	4.41	5.23	5.87	6.31	6.53													
180	2.81	4.11	5.28	6.30	7.13	7.74	8.12	8.25												
190	3.31	4.85	6.27	7.51	8.56	9.37	9.92	10.20												
200	3.87	5.68	7.36	8.86	10.15	11.19	11.95	12.41	12.57											
210	4.48	6.6	8.58	10.36	11.92	13.21	14.21	14.89	15.24											
220	5.16	7.61	9.91	12.01	13.88	15.46	16.72	17.65	18.22	18.41										
230	5.90	8.72	11.38	13.83	16.03	17.93	19.50	20.70	21.52	21.94										
240	6.71	9.93	12.98	15.81	18.38	20.64	22.54	24.06	25.17	25.84	26.7									
250	7.91	11.71	15.34	18.72	21.82	24.58	26.95	28.90	30.39	31.40	31.91									
260	9.26	13.73	18.00	22.01	25.71	29.04	31.95	34.40	36.34	37.75	38.61	38.90								
270	10.70	15.99	20.99	25.71	30.10	34.08	37.60	40.62	43.09	44.98	46.25	46.90								
280	12.47	18.52	24.34	29.86	35.01	39.73	43.95	47.63	50.70	53.15	54.91	55.98	56.34							
290	14.36	21.34	28.07	34.48	40.49	46.04	51.05	55.47	59.25	62.33	64.67	66.25	67.05							
300	16.46	24.46	32.21	39.61	46.59	53.06	58.97	64.23	66.79	72.60	75.61	77.79	79.11	79.55						
310	18.77	27.92	36.79	45.30	53.34	60.85	67.75	73.95	79.41	84.05	87.83	90.70	92.63	93.60						
320	21.32	31.73	41.84	51.56	60.80	69.45	77.45	84.72	91.17	96.75	101.4	105.06	107.71	109.31	109.85					
330	24.12	35.92	47.40	58.46	69.00	78.93	88.15	96.65	104.16	110.79	116.42	120.99	124.47	126.80	127.97					
340	27.19	40.51	53.48	66.01	77.99	89.32	99.90	109.64	118.45	126.26	132.99	138.59	143.00	146.18	148.75					
350	30.54	45.62	60.13	74.28	87.83	100.7	112.77	123.94	134.13	143.24	151.21	157.96	163.43	167.58	170.37	171.77				


This moment of inertia chart is for double-glazed systems.

$f=H/300 < 0,8$ cm (Maximum permissible deviation)

Consult glass firms to determine type and features of the glass.

Thickness of the glass alters for different distances and heights.

STATIC CALCULATION EXAMPLE

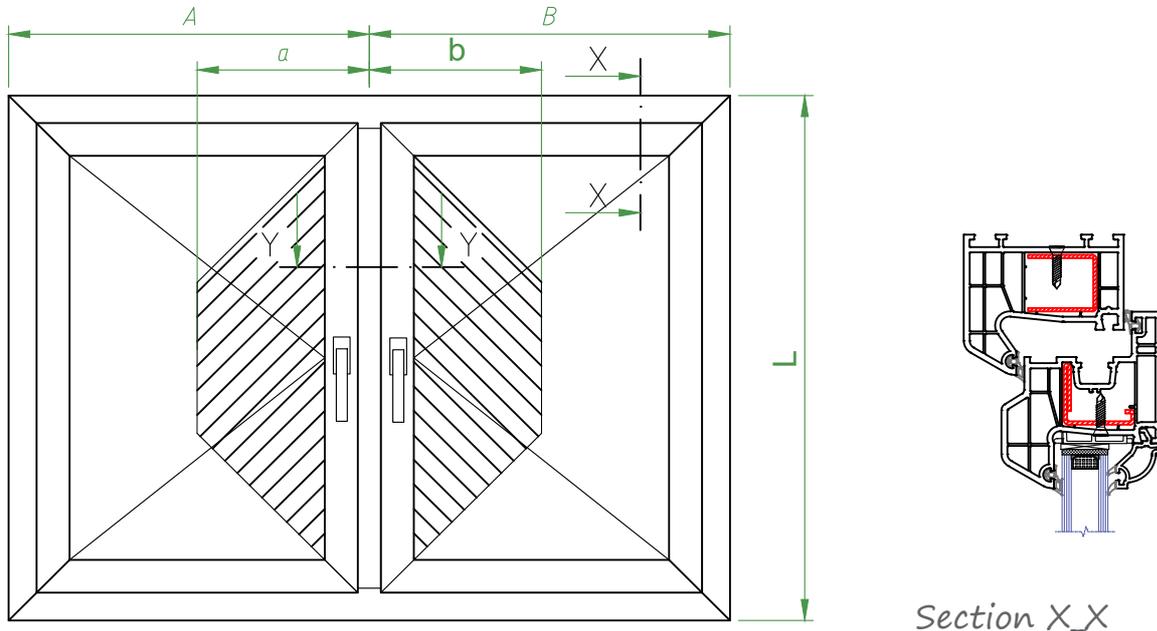

Section X_X

Height of Window $L = 180 \text{ cm}$

Width of Area $A = 100 \text{ cm}$

Width of Area $B = 100 \text{ cm}$

Width of Loading $a = 50 \text{ cm}$

Width of Loading $b = 50 \text{ cm}$

Height of Building $h = 8 \text{ mt}$


Wind Pressure $q = 50 \text{ kp/m}^2$

Constant Multiply $c = 1.2$

Wind Load $w = q \times c = 50 \times 1.2 = 60 \text{ kp/m}$

Allowable Deflection $L/300 \quad F = 180 / 300 = 6 \text{ mm}$

Modulus of Elasticity $E = 2.1 \times 10^6 \text{ kp/cm}$

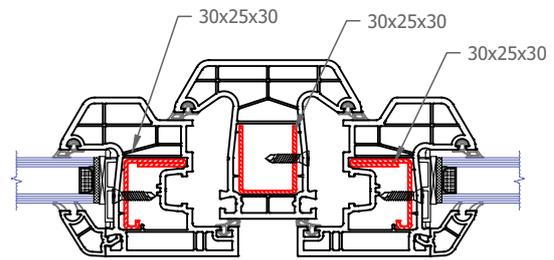

Section Y_Y

$$I_x = \text{Required Moment of Inertia (cm}^4) \quad I_{x_1} = \frac{W L^4 a}{1920 \cdot E \cdot F} \left(25 - 40 \left(\frac{a}{L} \right)^2 + 16 \left(\frac{a}{L} \right)^4 \right)$$

$$I_{x_2} = \frac{W L^4 b}{1920 \cdot E \cdot f} \left(25 - 40 \left(\frac{b}{L} \right)^2 + 16 \left(\frac{b}{L} \right)^4 \right)$$

$$I_{x_1} = \frac{0.00060 \times 180^4 \times 50}{1920 \times 21,100,000 \times 0.6} \left(25-40 \left(\frac{50}{180} \right)^2 + 16 \left(\frac{50}{180} \right)^4 \right) = 2.87 \text{ cm}^4$$

$$I_{x_2} = \frac{0.00060 \times 180^4 \times 50}{1920 \times 21,100,000 \times 0.6} \left(25-40 \left(\frac{50}{180} \right)^2 + 16 \left(\frac{50}{180} \right)^4 \right) = 2.87 \text{ cm}^4$$

Height of Installation 0-8 m
Wind Pressure 60kp/m²

L = height of sash (cm)	width of sash a (cm)				
	20	30	40	50	60
100	0.21	0.29	0.34	0.36	
110	0.28	0.39	0.48	0.52	
120	0.37	0.52	0.64	0.72	0.74
130	0.47	0.67	0.84	0.95	1.01
140	0.59	0.85	1.07	1.23	1.34
150	0.73	1.06	1.34	1.56	1.72
160	0.89	1.30	1.65	1.94	2.16
170	1.07	1.56	2.00	2.38	2.67
180	1.28	1.87	2.40	2.87	3.24
190	1.50	2.21	2.85	3.42	3.89

Required maximum measurement at 180 cm height and 50 cm width is chosen from the chart.

$$\text{Sum of } I_x = I_{x_1} + I_{x_2} \quad 2.87 + 2.87 = 5.74 \text{ cm}$$

$$\text{Sum of } I_x \text{ on chart } I_x = I_{x_1} + I_{x_2} \quad 2.87 + 2.87 = 5.74 \text{ cm}$$

With this calculation, the accuracy of the chart is verified.

System is considered as Sash + Mullion Profile + Sash.

Sash Reinforcement $I_x = 2.01 \text{ cm}$ (Thickness= 2mm)

Mullion Reinforcement $I_x = 1.48 \text{ cm}$ (Thickness= 2mm)


Sash Reinforcement $I_x = 2.01 \text{ cm}$ (Thickness= 2mm)

Total I_x in the System = $2.3 + 1.7 + 2.3 = 6.36 \text{ cm}$


Total I_x of Reinforcement in the system > Required

$5.74 \text{ cm} < 6.36 \text{ cm}$ with the help of Reinforcement stated above ,the window with reinforcement profile can be constructed.

Drainage And Smoothing Out Pressure Holes

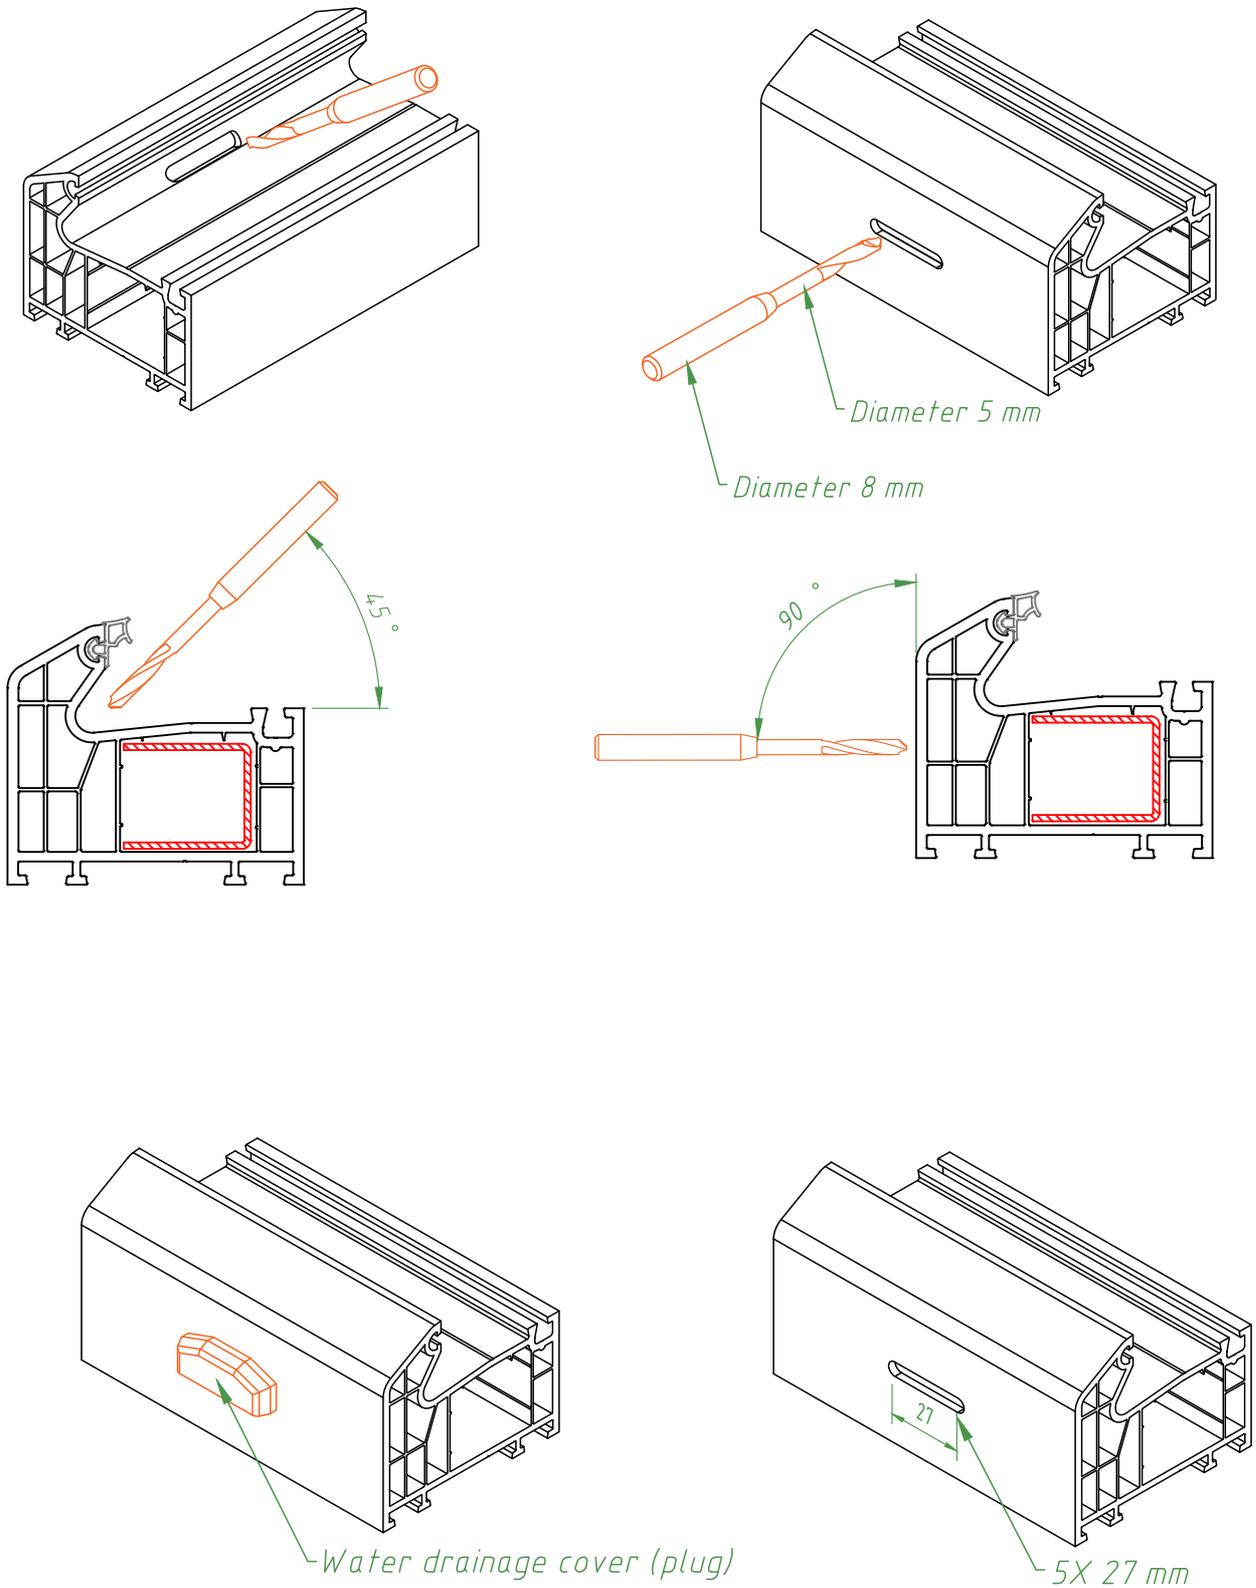


Drainage And Smoothing Out Pressure Holes

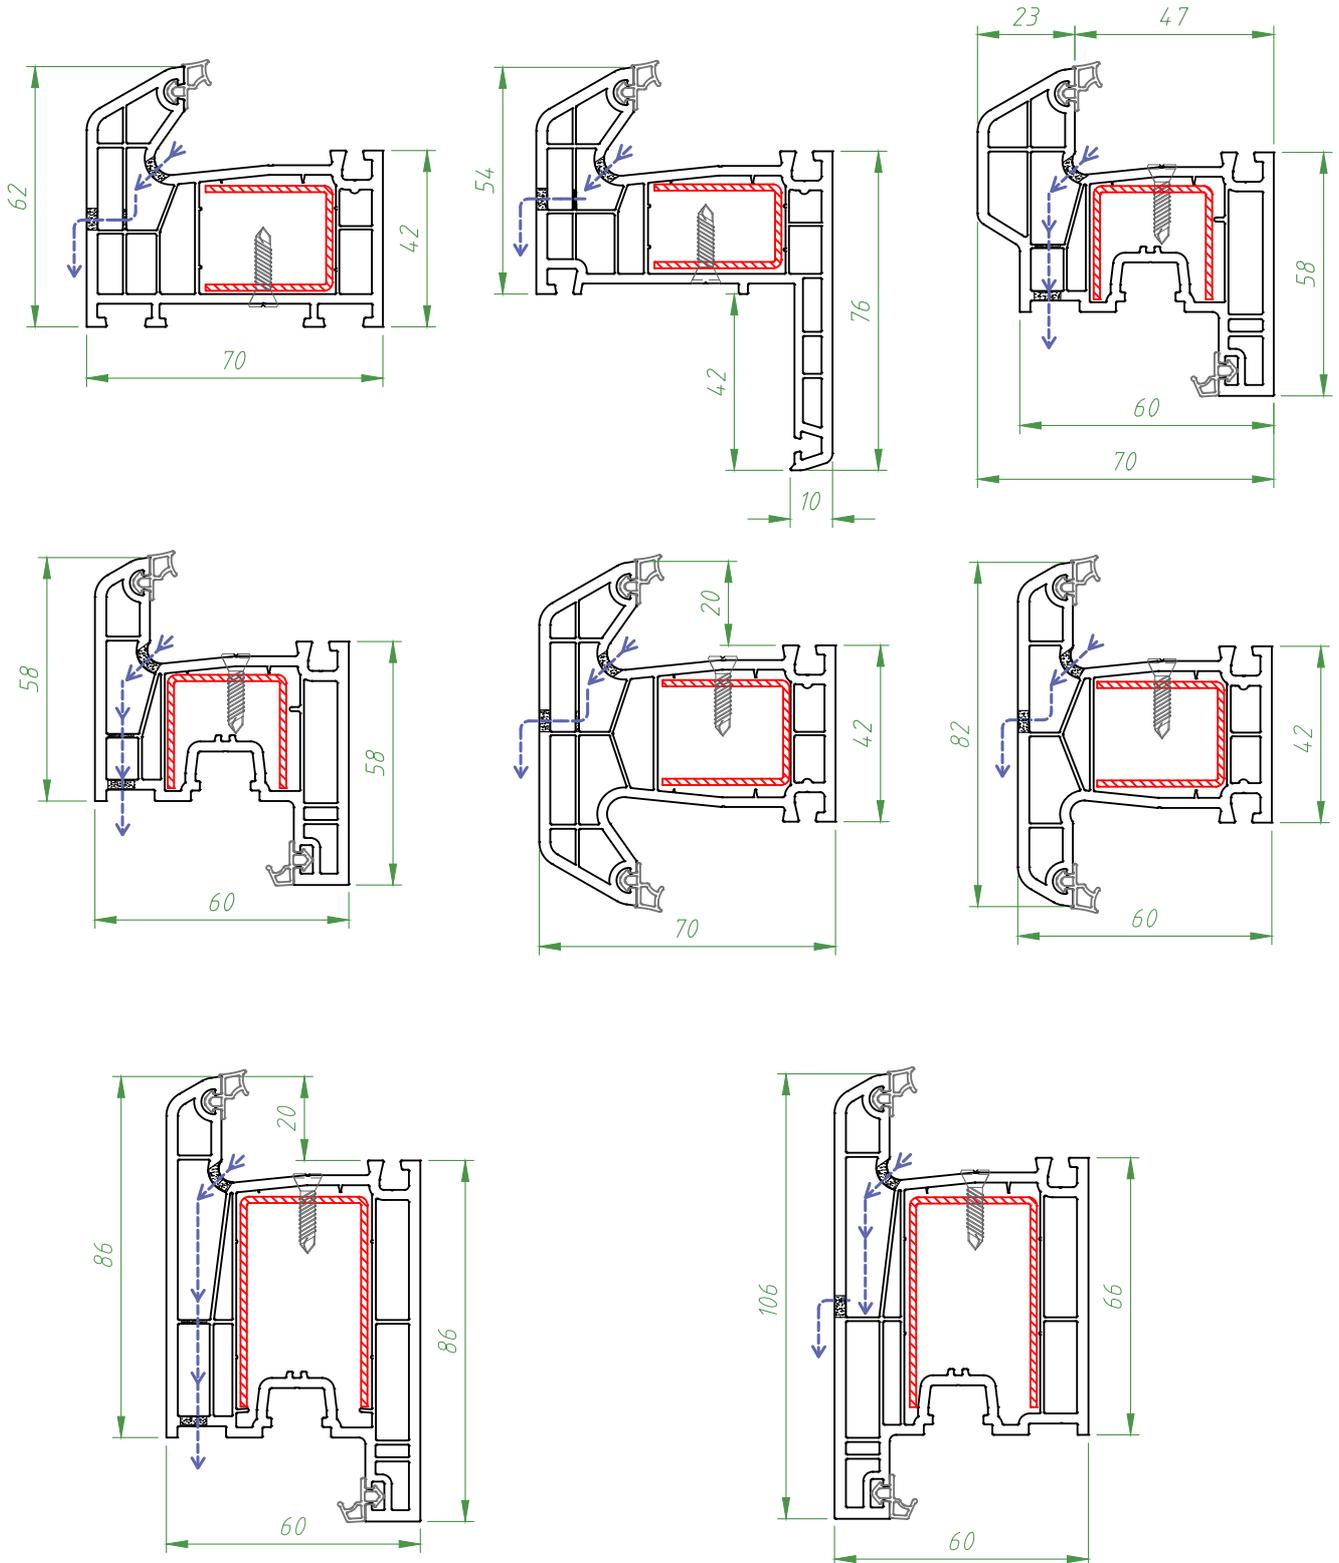

Profile Section Length - X<500 mm1 - Hole
500mm<x-profile section's lenght<1000mm - 2 holes
1000mm<x-profile section's lenght<2000mm - 3 holes
2000mm<x-profile section's lenght<3000mm - 3 holes

Supporting Seal-in Case Of Revolving Sash

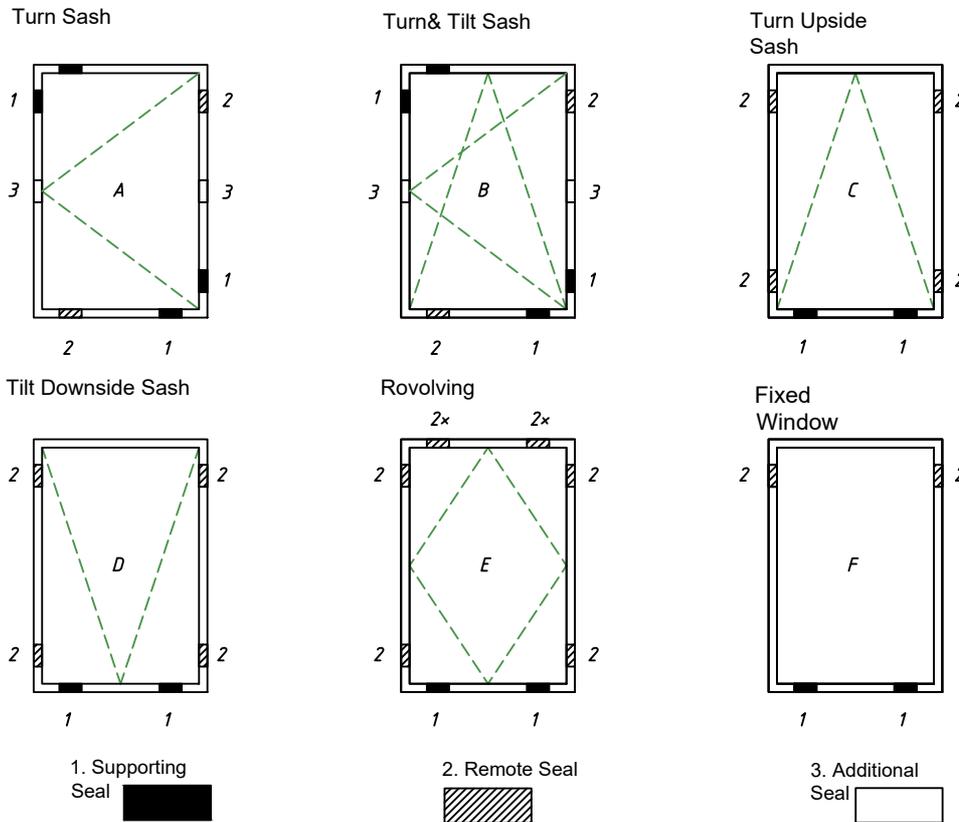

Supporting Seal-in Case Of Revolving Sash




To transport the final product, use special cork or plastic or foam corners to prevent curling or damage to products. All window components should be tight. The protective label on the profile is only after the window is installed.

To adjust the window in place, use an anchor or bolts. Without an amplified profile, the hinged screw spacing is greater than 600 mm, or the reinforcement profile is 700 mm. The distance between the anchorage and the inner corner should not be less than 100 mm and between the support and the outer corner of 200 mm.

The fasteners are used to consider increasing the structural size of the windows during installation. The clamps stacked up and down the wall. Systems with no moving parts for better placement in a closed group. It is not advisable to fix the frame in the middle of the cross section of the profile or in the corners to the frame.




On the contrary, the windows with the above-mentioned specifications should be cleaned up. The bottom side of the window must be completely resistant to water penetration. The windows are installed in the frames and fitted. Wall holes should be filled with well-insulated materials. Exterior rubbers prevent rain from entering the inside. Internal rubber seals prevent condensation. The rubber seals should be flat and integrated.

Accessories (welding mold systems)

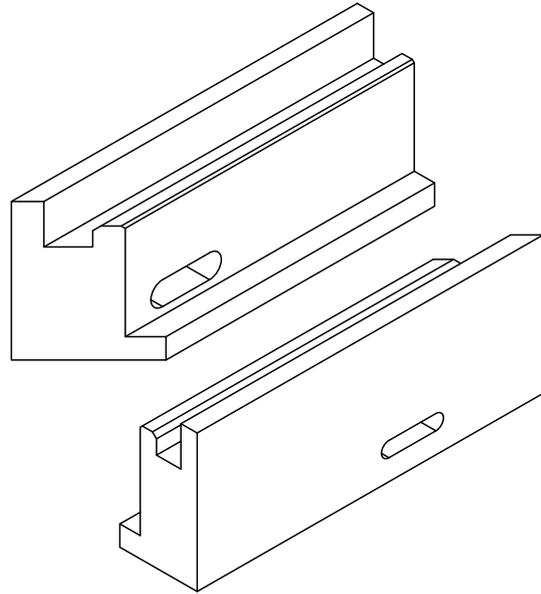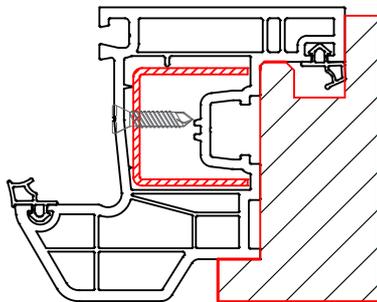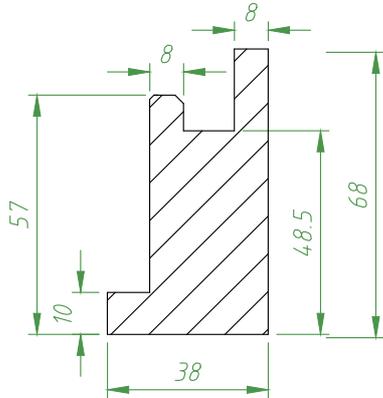



Technical Code	Machine name	Single head	Double head
	KABAN Machines	37001-12100	37001-12200
	MURAT Machines	37002-12100	37002-12200
	OZGENC Machines	37003-12100	37003-12200
	YILMAZ Machines	37004-12100	37004-12200

Accessories (welding mold systems)

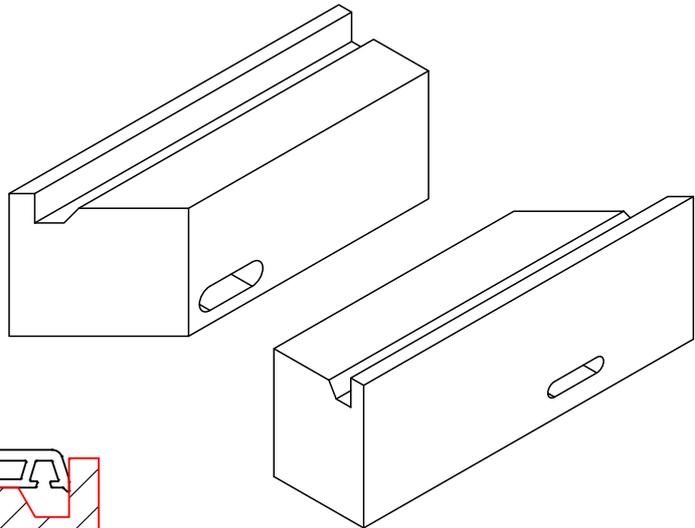
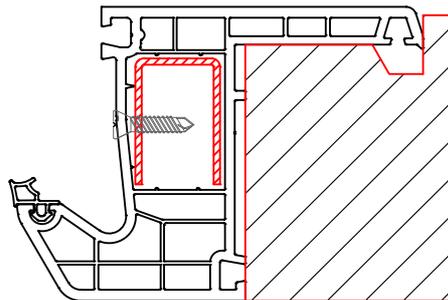
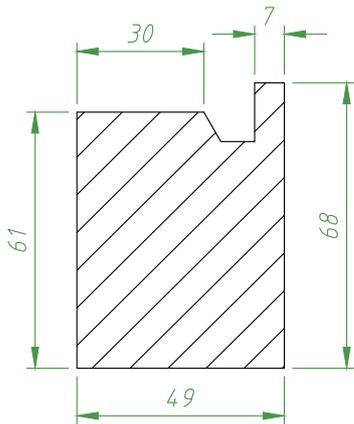


Technical Code	Machine name	Single head	Double head
	KABAN Machines	37001-16100	37001-16200
	MURAT Machines	37002-16100	37002-16200
	OZGENC Machines	37003-16100	37003-16200
	YILMAZ Machines	37004-16100	37004-16200


Accessories (welding mold systems)

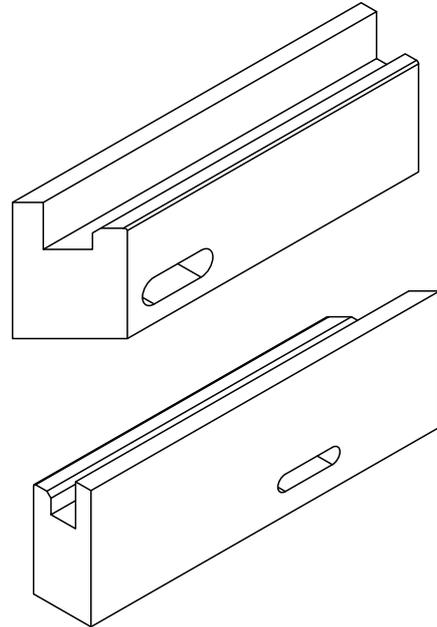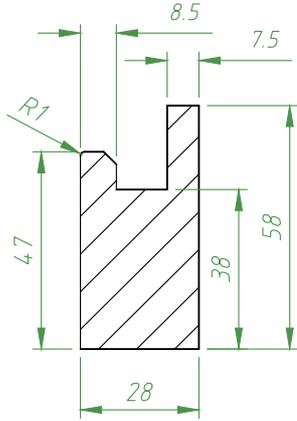




Technical Code	Machine name	Single head	Double head
	KABAN Machines	36401-12100	36401-12200
	MURAT Machines	36402-12100	36402-12200
	OZGENC Machines	36403-12100	36403-12200
	YILMAZ Machines	36404-12100	36404-12200

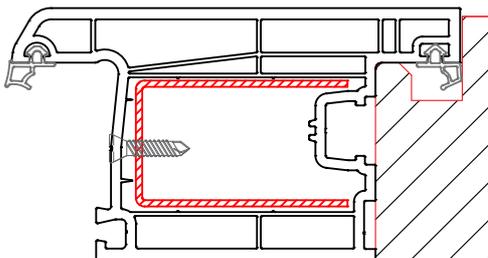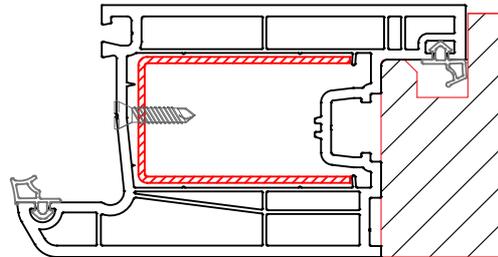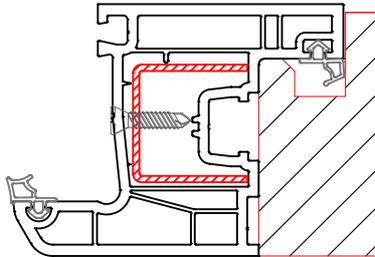



Accessories (Cutting Fixture)

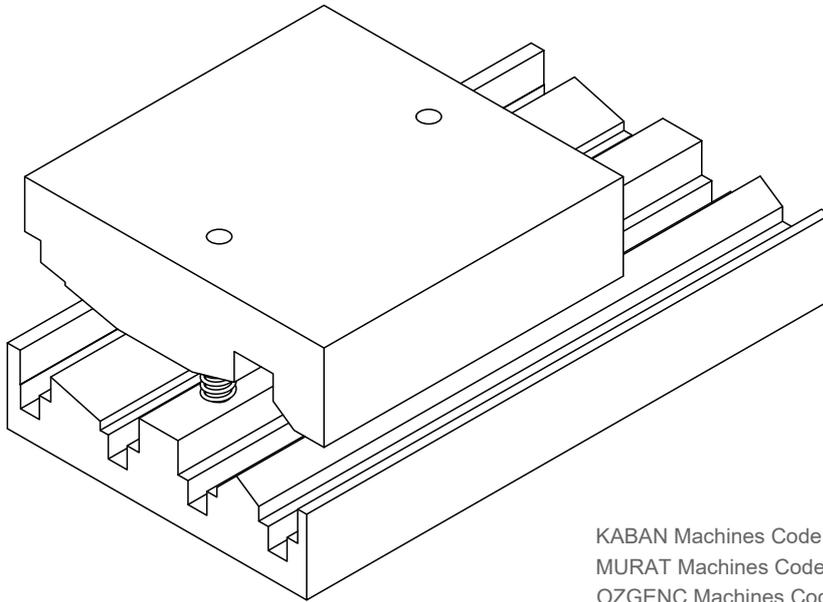

KABAN Machines Code: 31002- 70002
MURAT Machines Code: 31002- 70001
OZGENC Machines Code: 31002- 70003
YILMAZ Machines Code: 31002- 70004

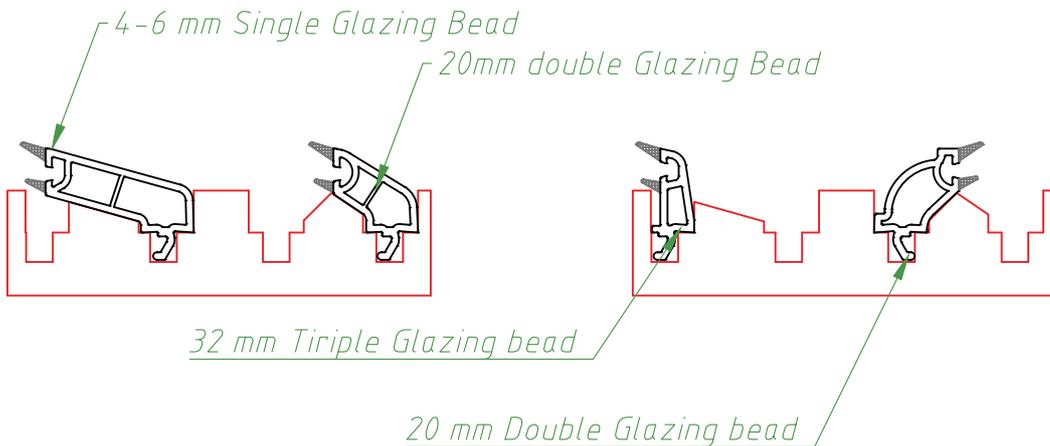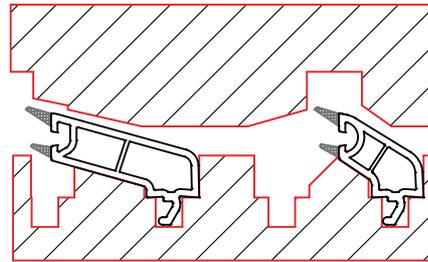
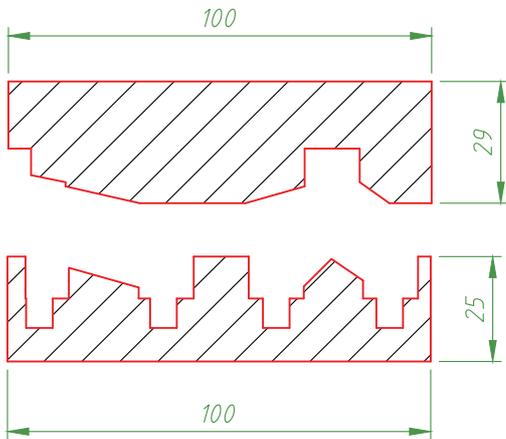


Accessories (Blade Cleaner - Frame Profile)

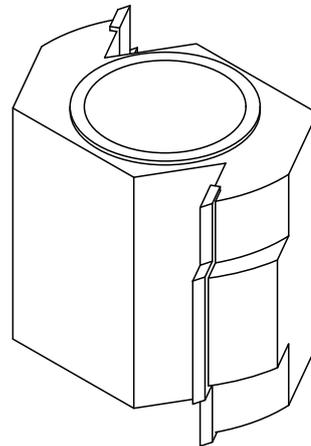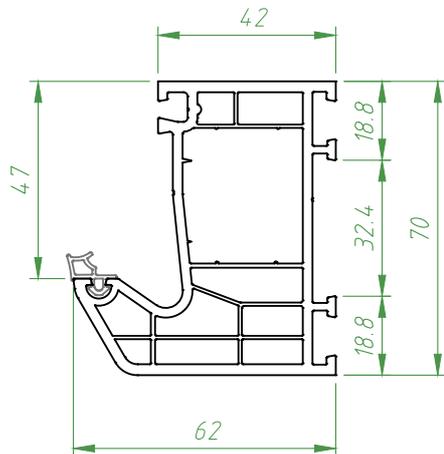

Code (Normal): 31001-70001


Accessories (Milling Blade - Mullion Profile)

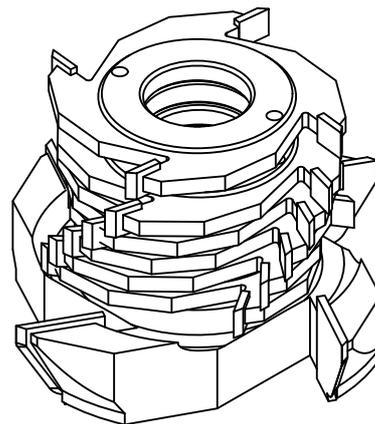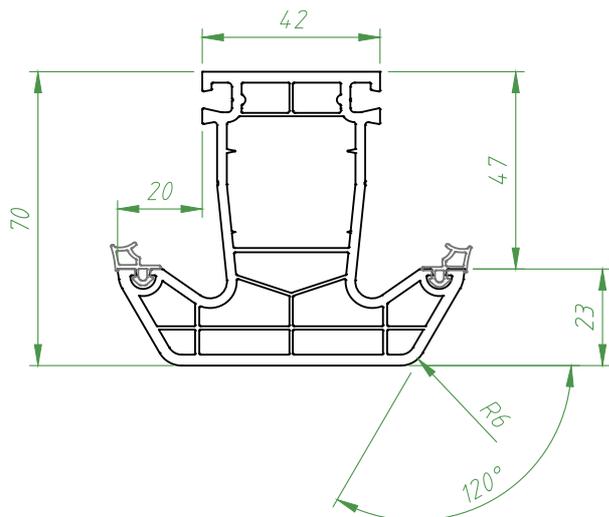



Code (Normal): 31001-70003

Code (elumatec Machines): 31001-70005

Accessories (Blade Cleaner - Frame Profile With Sill)

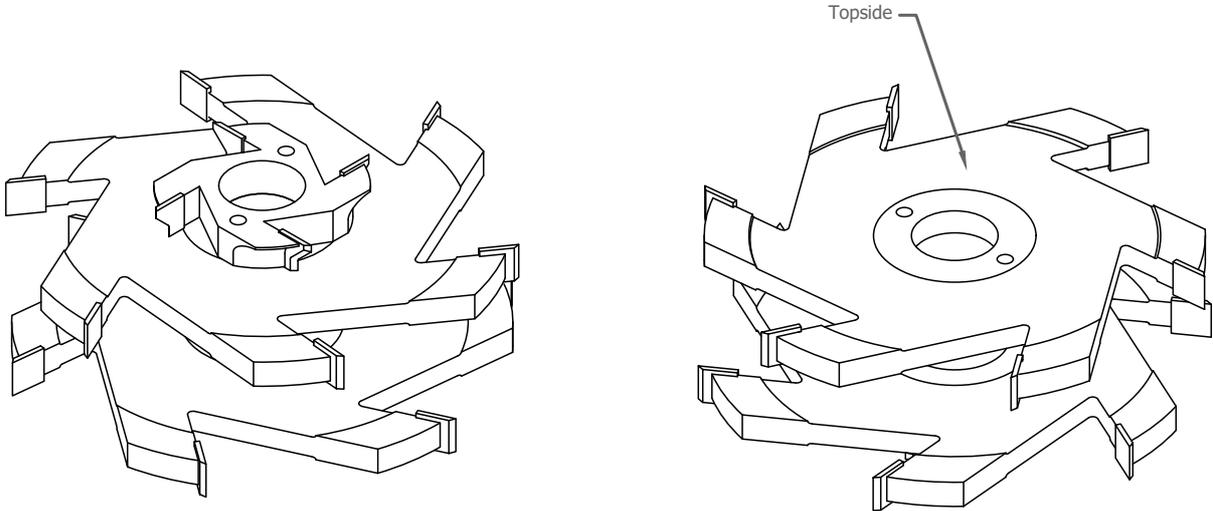

Code (Normal): 31001-70002




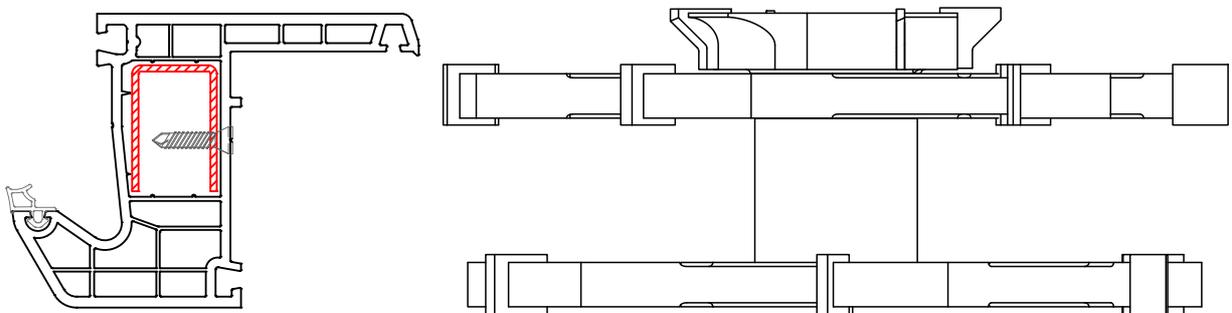
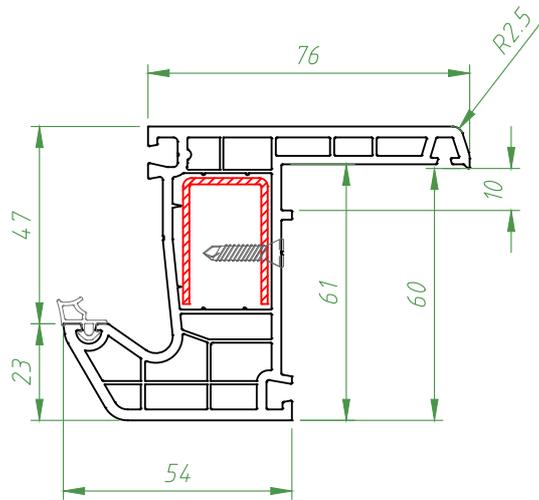


Accessories (Blade Cleaner - Offset Type Sash Profile)



By mounting the opposite blade (NR4) to the W640 series Sash Blade, the offset type sash can be poured.



Code (Normal): 31001-64004

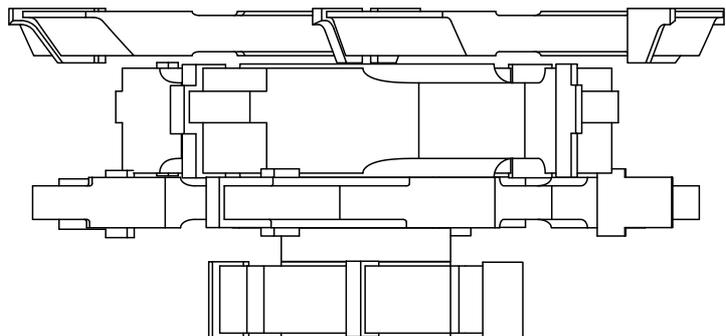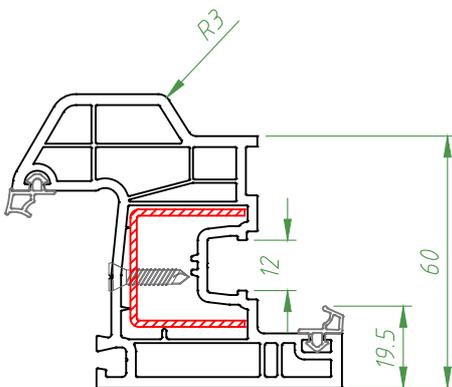
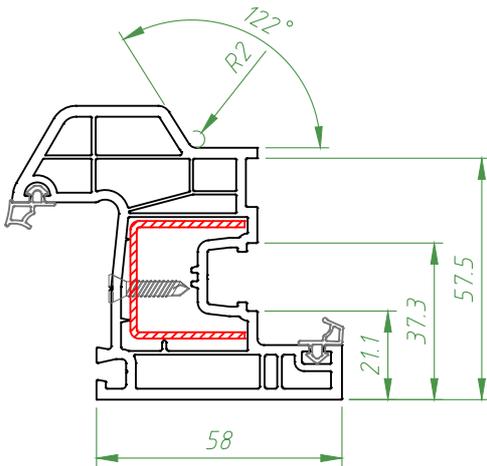
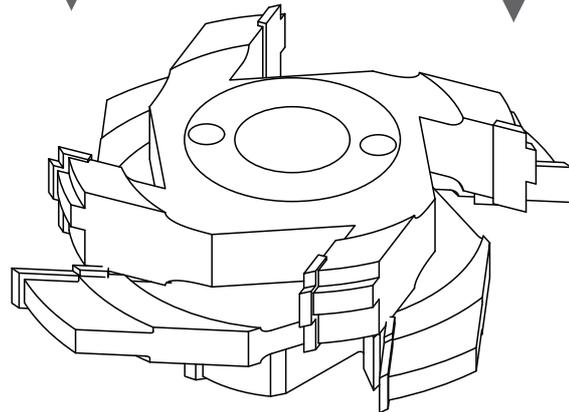
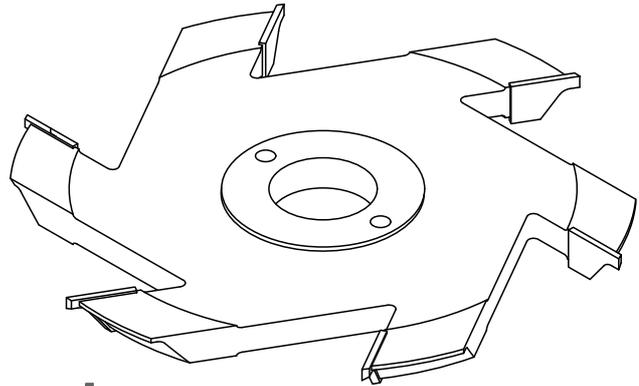


Accessories (Blade Cleaner- Sash Profile)

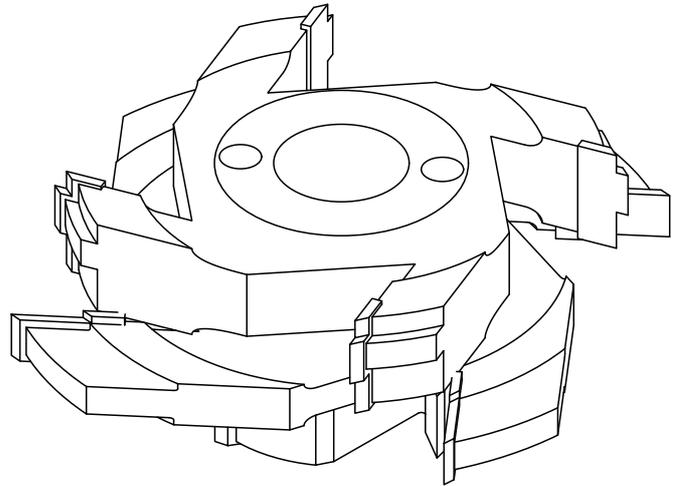


Code (Normal): 31001-64005

Code (elumatec Machines): 31001-64008

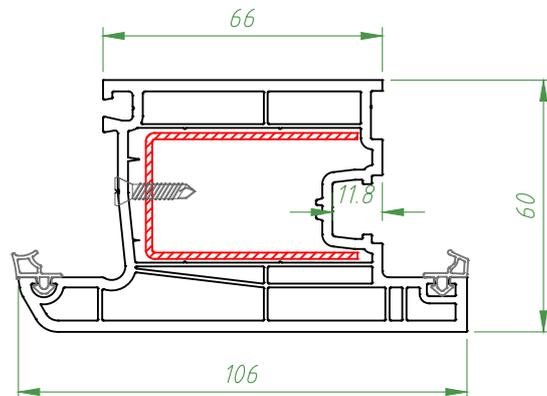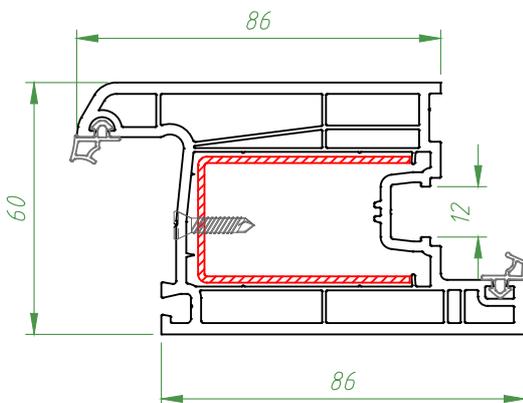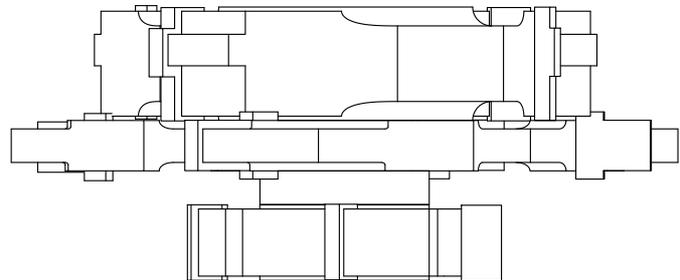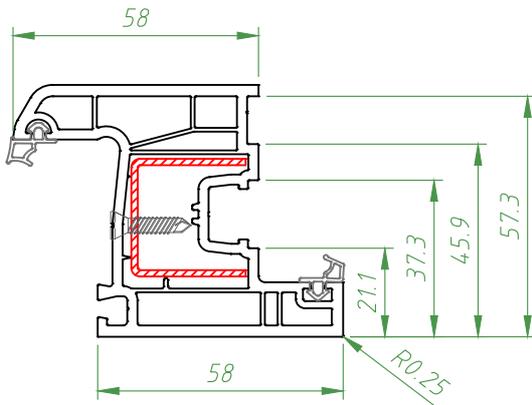


Accessories (Mullion Profile Connectors)

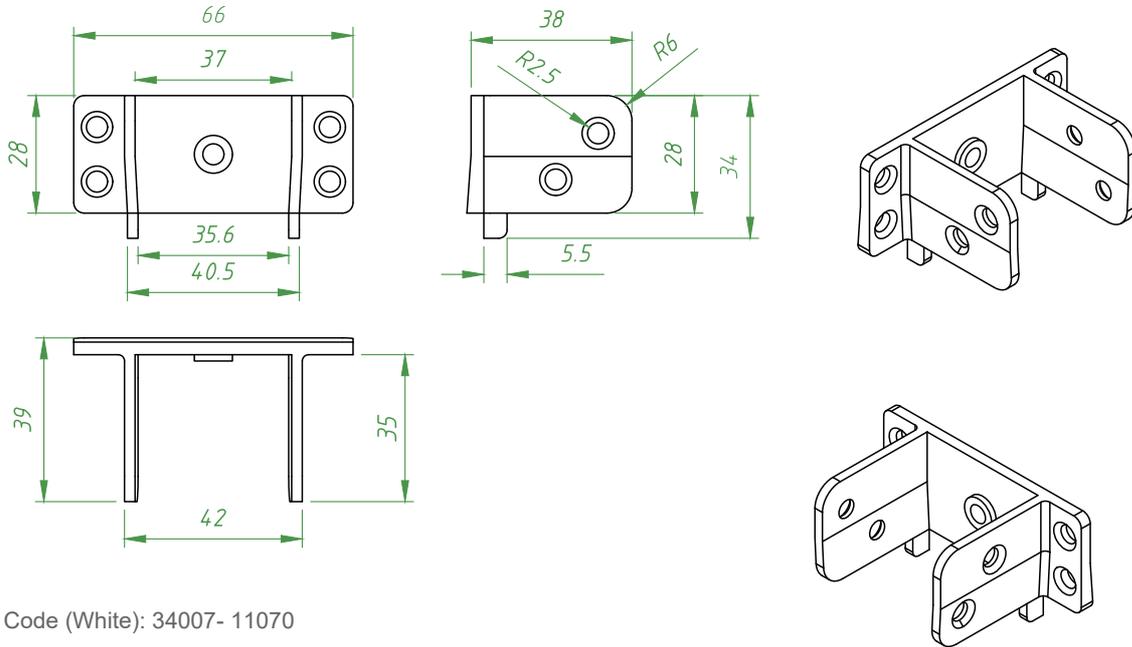

Code (White): 34007- 11070

Code (Brown):34007- 11071



Accessories (Lap Joint Cover)

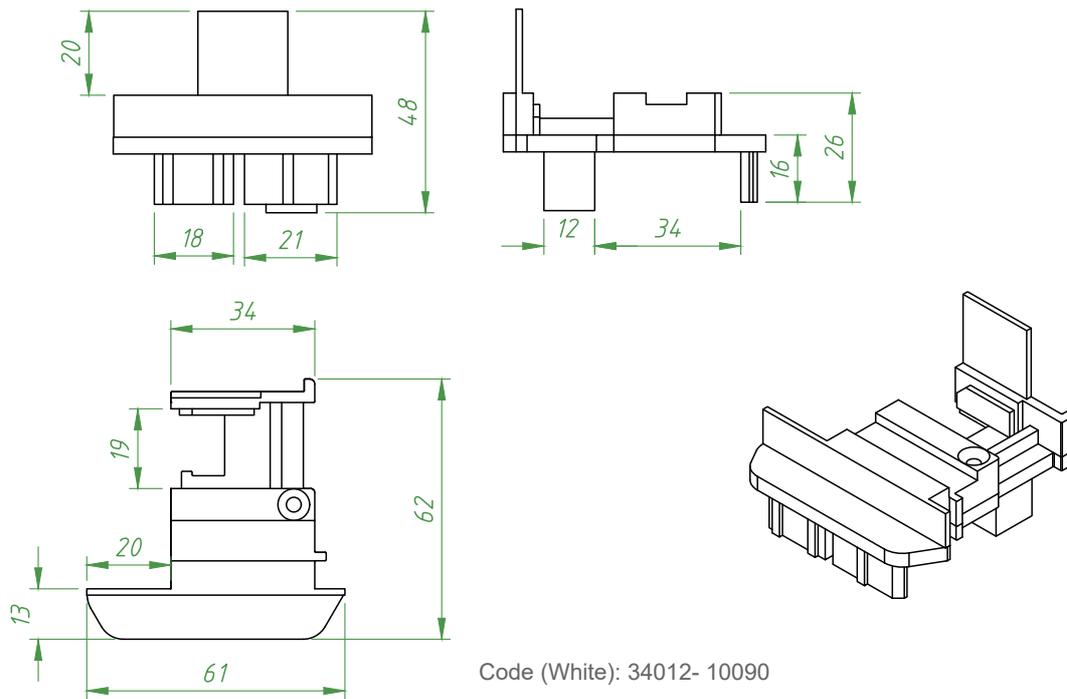


Code (White): 34012- 10090

Code (Brown):34012- 10091

Assembling Accessories (Mullion Profile Connectors)

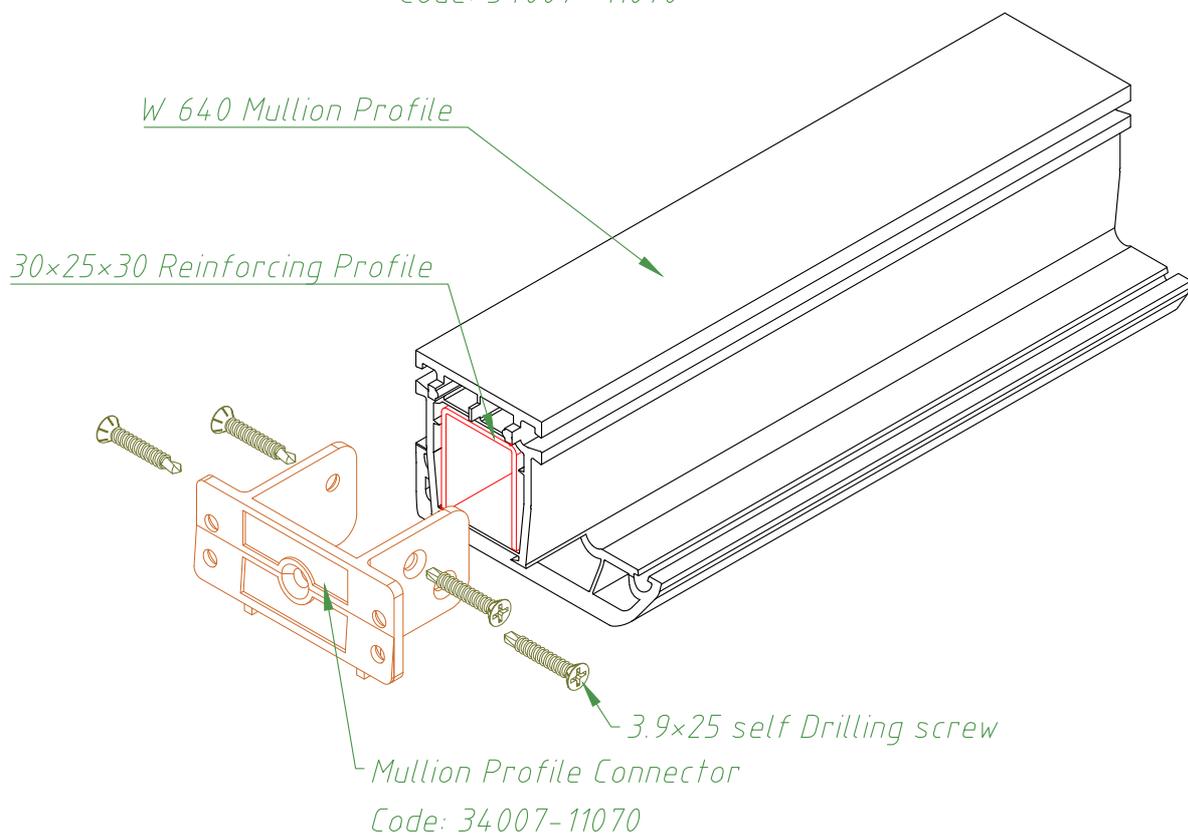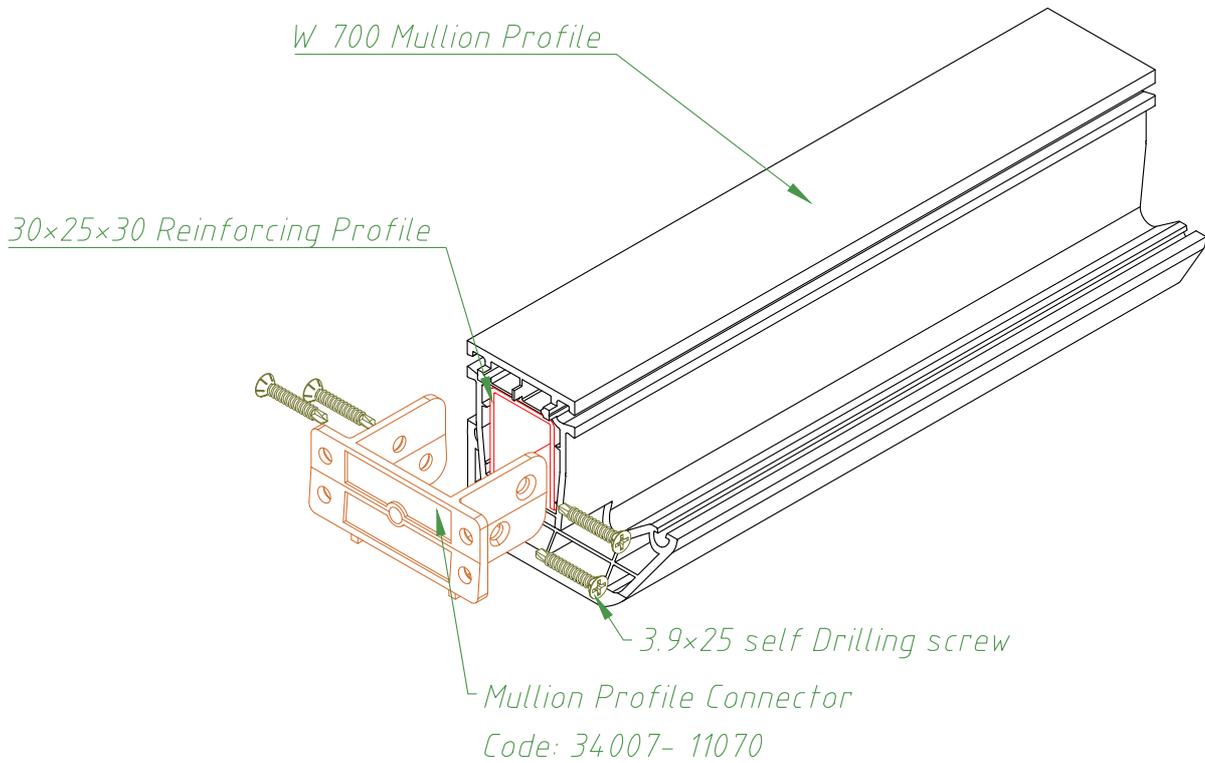

Technical Calculation



X = window measure



Calculations:

Frame Measure (a) : $X + 6$

Sash Measure (b) : $X - 62$

Glazing Measure (c) : $X - 184$

Glass Measure (d) : $X - 194$

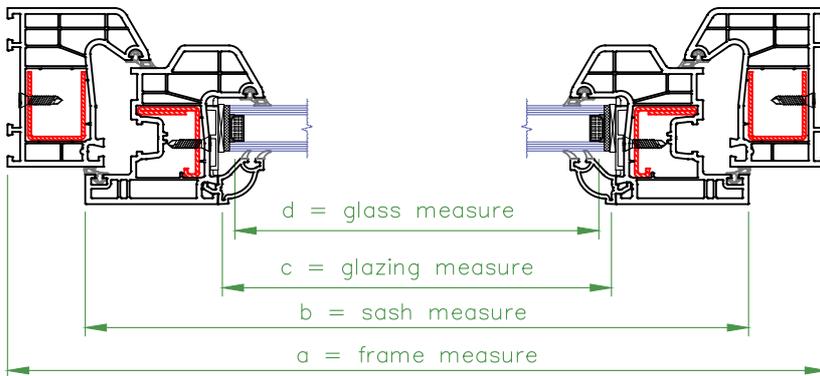

X = window measure


Calculations:

Frame Measure (a) : $X + 90$


Sash Measure (b) : $X - 46$

Glazing Measure (c) : $X - 168$

Glass Measure (d) : $X - 178$


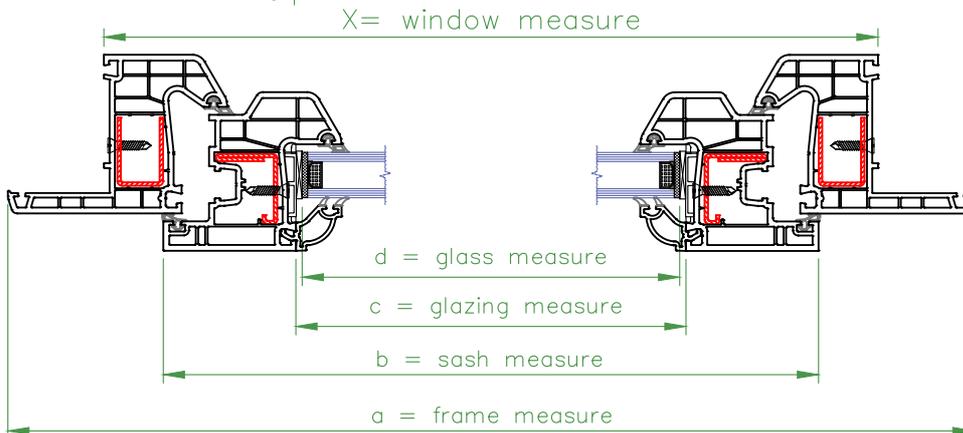


Technical Calculation

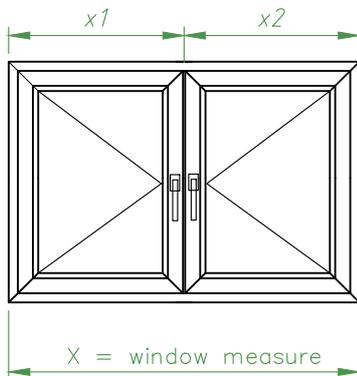


Calculations:

- Frame Measure (a) : $X + 6$
- Sash Measure (b1) : $X1 - 31$
- Sash Measure (b2) : $X2 - 31$
- Glazing Measure (c1) : $X1 - 153$
- Glazing Measure (c2) : $X2 - 153$

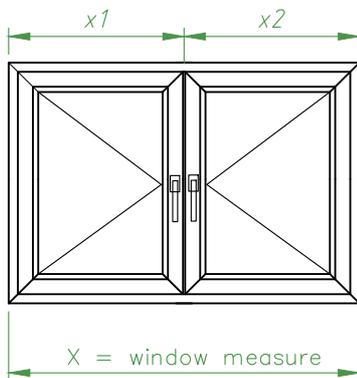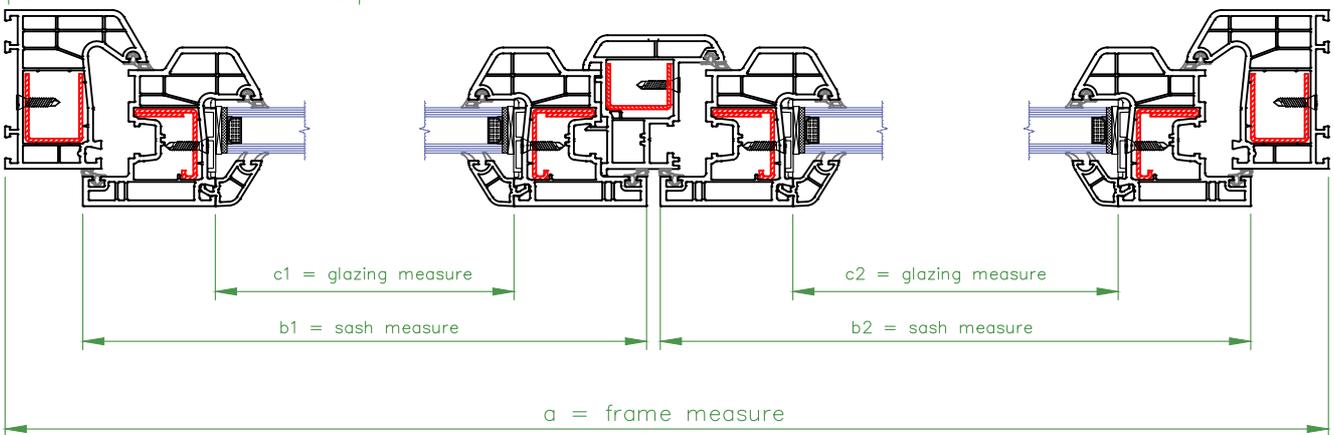


Calculations:

- Frame Measure (a) : $X + 90$
- Sash Measure (b1) : $X1 - 23$
- Sash Measure (b2) : $X2 - 23$
- Glazing Measure (c1) : $X1 - 145$
- Glazing Measure (c2) : $X2 - 145$


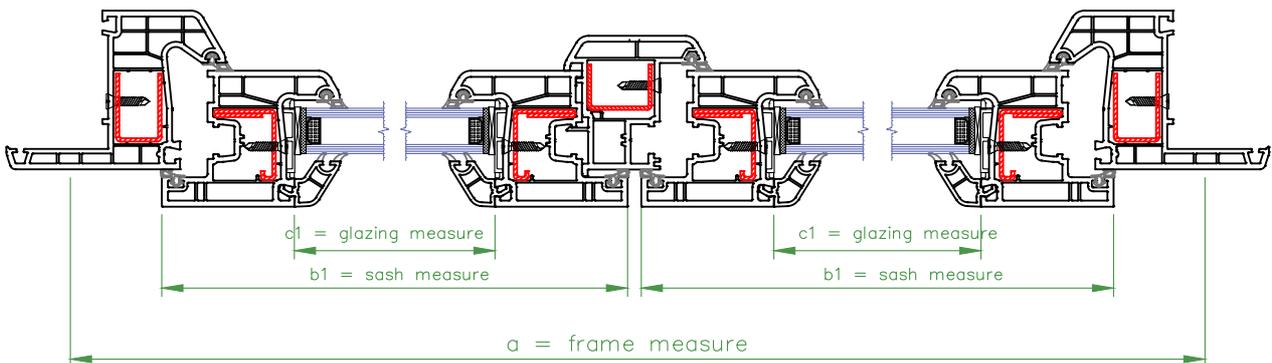


Technical Calculation

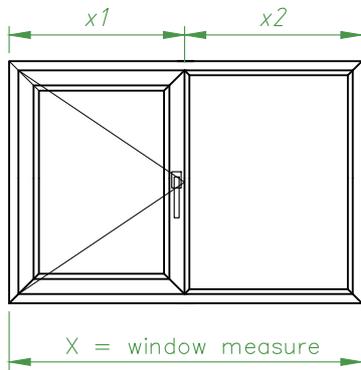

Calculations:

- Frame Measure (a) : $X + 6$
- Sash Measure (b) : $X_1 - 41$
- Glazing Measure (c1) : $X_1 - 163$
- Glazing Measure (c2) : $X_2 - 63$

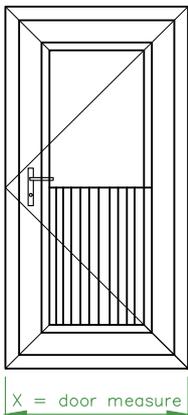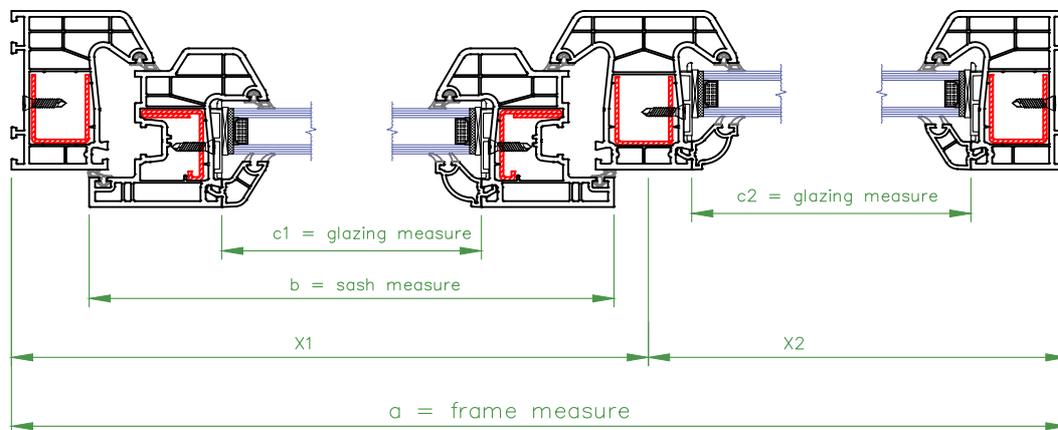

Calculations:

- Frame Measure (a) : $X + 6$
- Sash Measure (b) : $X - 62$
- Glazing Measure (c) : $X - 240$
- Glass Measure (d) : $X - 250$

